

30

LINE POST	
CAT. NO. 2115	
15 kV	"F" NECK

| ENG. MGR
 | ENG
 | PURCH.
 | MKTG.
 | PLT. MGR.
 | COST
 | PROD.
 | INSP
 | GLAZE
 | BUSHING
 | MAKING
 | SHIP
 | ASSEM
 | MODEL
 | MACH.
 | 45
 | TOOLING
 | CER LAB
 | EL LAB
 | Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 7.5

MECHANICAL VALUES

CANTILEVER STRENGTH LB 2,000

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY	kV	65
60 HERTZ FLASHOVER-WET	kV	40
IMPULSE FLASHOVER -POS.	kV	100
IMPULSE FLASHOVER -NEG.	kV	130

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	10
MAXIMUM RIV @ 1000 kHz	μ V	50

PACKING INFORMATION

NET WEIGHT PER 100	LB	770
PACKED WEIGHT PER 100	LB	820
NO. IN STANDARD PACKAGE		3

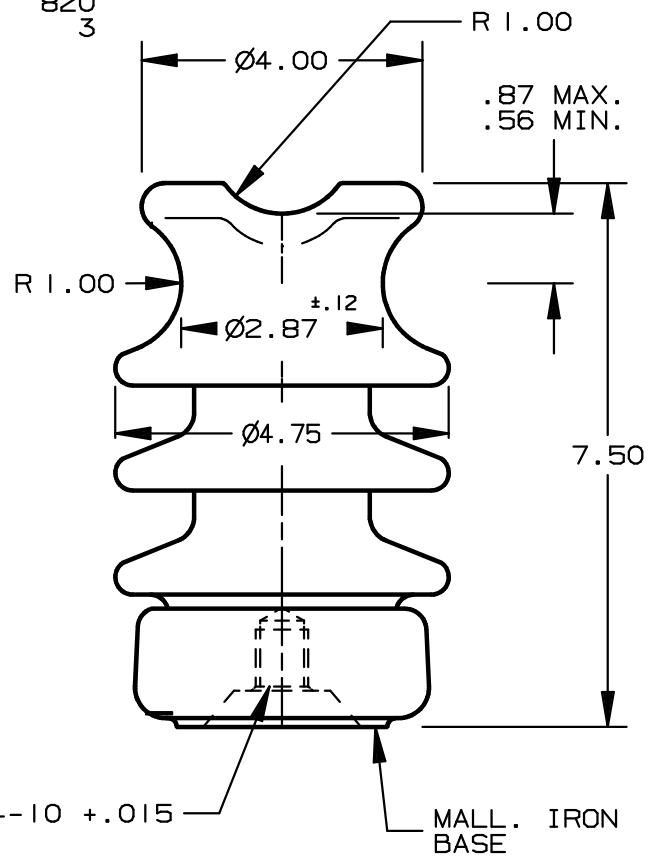

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED, OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 2115

	Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (716)924-2127	2115

01-04-01

TP PP AS