

LINE POST

CAT. NO. 2127

27 kV "F" NECK

30

ENG. MGR
 ENG
 PURCH.
 MKTG.
 PLT. MGR.
 COST
 PROD.
 INSP
 GLAZE
 BUSHING
 MAKING
 SHIP
 ASSEM
 MODEL
 MACH.
 45
 TOOLING
 CER LAB
 EL LAB
 O. A.

DIMENSIONS

LEAKAGE DISTANCE IN 15
 DRY ARCHING DISTANCE IN 7.75

MECHANICAL VALUES

CANTILEVER STRENGTH LB 1,500

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY kV 95
 60 HERTZ FLASHOVER-WET kV 65
 IMPULSE FLASHOVER-POS. kV 135
 IMPULSE FLASHOVER-NEG. kV 190

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 20
 MAXIMUM RIV @ 1000 kHz μ V 50

PACKING INFORMATION

NET WEIGHT , PER 100 LB 969
 PACKED WEIGHT , PER 100 LB 1,044
 NO. IN STANDARD PACKAGE 6

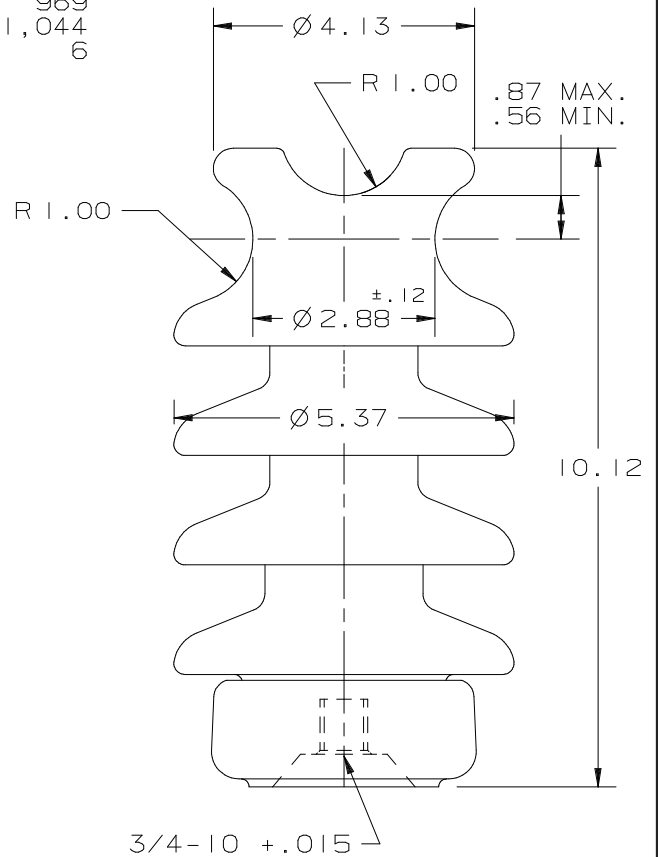

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND CONTAINS
 PROPRIETARY AND CONFIDENTIAL INFORMATION
 WHICH MUST NOT BE DUPLICATED, USED,
 OR DISCLOSED OTHER THAN AS EXPRESSLY
 AUTHORIZED BY VICTOR INSULATORS, INC.



Victor Insulators, Inc.

280 MAPLE AVENUE
 MAIL: P.O. BOX B, VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

2127

04-02-96

RR PP AS