

30

LINE POST	
CAT. NO. 62055	
34.5 kV	ANSI CLASS 57-2
F NECK	

ENG. MGR
 ENG
 PURCH.
 MKTG.
 PLT. MGR.
 COST
 PROD.
 INSP
 GLAZE
 BUSHING
 MAKING
 SHIP
 ASSEM
 MODEL
 MACH.
 45
 TOOLING
 CER LAB
 EL LAB
 Q. A.

DIMENSIONS

LEAKAGE DISTANCE	IN	22
DRY ARCING DISTANCE	IN	9 1/2

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	2,800
---------------------	----	-------

ELECTRICAL VALUES


60 HERTZ FLASHOVER - DRY	kV	100
60 HERTZ FLASHOVER - WET	kV	70
IMPULSE FLASHOVER - POS.	kV	160

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	22
MAXIMUM RIV @ 1000 kHz	μV	100

PACKING INFORMATION

NET WEIGHT PER 100	LB	1,600
PACKED WEIGHT PER 100	LB	1,655
NO. IN STANDARD PACKAGE		3

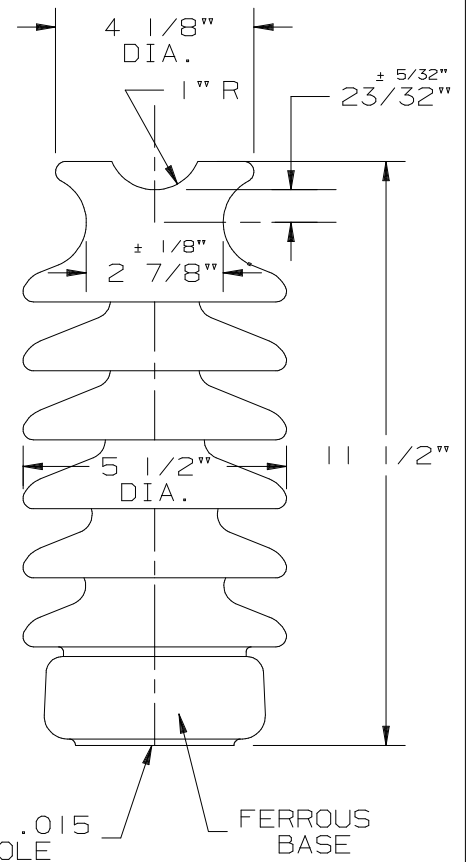

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

07-08-98		PP	AS
07-01-97	TP	PP	



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

62055