

30

CLAMP TOP LINE POST

VERTICAL MOUNTING

88kV

CAT. NO. 62159

ANSI CLASS 57-16

- 1 ENG. MGR.
- 2 ENG.
- PURCH.
- 1 MKTG.
- COST
- PROD.
- INSP.
- GLAZE
- BUSHING
- MAKING
- SHIP.
- ASSEM.
- MODEL
- MACH.
- 45
- TOOLING
- CER. LAB.
- 1 EL. LAB.
- 1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE	IN	53
DRY ARCING DISTANCE	IN	19 $\frac{1}{4}$

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	2,800
---------------------	----	-------

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY	kV	180
60 HERTZ FLASHOVER-WET	kV	150
IMPULSE FLASHOVER-POS.	kV	300

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE RMS TO GRD.	kV	44
MAXIMUM RIV @ 1000 kHz	$\mu$ V	200

PACKING INFORMATION

NET WEIGHT PER 100	LB	6,750
PACKED WEIGHT PER 100	LB	7,150
NO. IN STANDARD PACKAGE		1

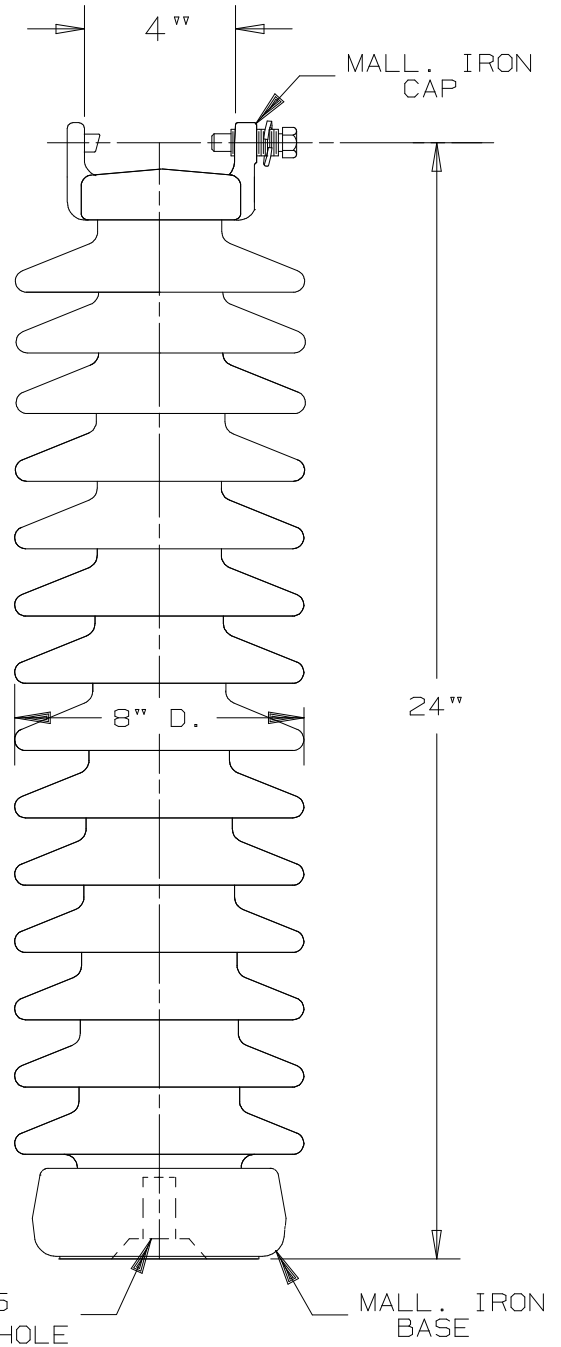

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 62159



Victor Insulators, Inc.  
 280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (716)924-2127

62159

5-20-98

DF PP RG

SUPERSEDES DWG. 62159 DATED 5-14-93