

30

LINE POST	
CAT. NO. VI 57-2	
"F" NECK	
34.5 kV	ANSI 57-2

ENG. MGR.  
 2 ENG.  
 PURCH.  
 MKTG.  
 PLT. MGR.  
 COST  
 PROD.  
 INSP.  
 GLAZE  
 BUSHING  
 MAKING  
 SHIP.  
 ASSEM.  
 MODEL  
 MACH.  
 45  
 TOOLING  
 CER. LAB.  
 EL. LAB.  
 Q.A.

DIMENSIONS

LEAKAGE DISTANCE IN 22  
 DRY ARCING DISTANCE IN 9 1/2

MECHANICAL VALUES

CANTILEVER STRENGTH LB 2,800

ELECTRICAL VALUES


60 HERTZ FLASHOVER - DRY kV 110  
 60 HERTZ FLASHOVER - WET kV 85  
 IMPULSE FLASHOVER - POS. kV 180  
 IMPULSE FLASHOVER - NEG. kV 205

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 22  
 MAXIMUM RIV @ 1000 kHz  $\mu$ V 100

PACKING INFORMATION

NET WEIGHT PER 100 LB 1550  
 GROSS WEIGHT PER 100 LB 1600  
 NO. IN STANDARD PACKAGE 3

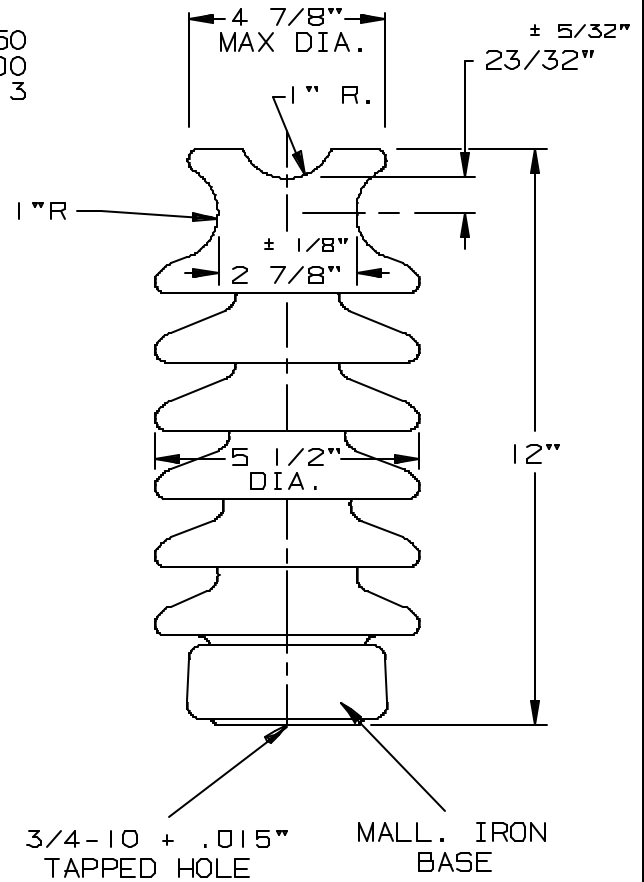

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

8-26-03

TM AS

**V** INSULATORS  
 VICTOR INSULATORS, INC.  
 280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (505)924-2127

VI 57-2