

PIN POST INSULATOR

CAT. NO. 34 & 34R

F-NECK 1.375" PINHOLE

LONG LEAKAGE

19

ENG. MGR
 ENG
 PURCH.
 MKTG.
 FLT. MGR.
 COST
 PROD.
 INSP
 GLAZE
 BUSHING
 MAKING
 SHIP
 ASSEM
 MODEL
 MACH.
 45
 TOOLING
 CER LAB
 EL LAB
 Q. A.

DIMENSIONS

LEAKAGE DISTANCE	IN	13
DRY ARCING DISTANCE	IN	6.75
MINIMUM PIN HEIGHT	IN	7

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,000
---------------------	----	-------

ELECTRICAL VALUES

60 HERTZ FLASHOVER-DRY	kV	85
60 HERTZ FLASHOVER-WET	kV	60
IMPULSE FLASHOVER-POS.	kV	140
IMPULSE FLASHOVER-NEG.	kV	170
60 HERTZ PUNCTURE VOLTAGE	kV	115


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE, RMS TO GRD.	kV	15
MAXIMUM RIV @ 1000 kHz		
RADIO FREED	μ V	100
PLAIN	μ V	8,000

PACKING INFORMATION

NET WEIGHT, PER 100	LB	585
PACKED WEIGHT, PER 100	LB	620
NO. IN STANDARD PACKAGE		12

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

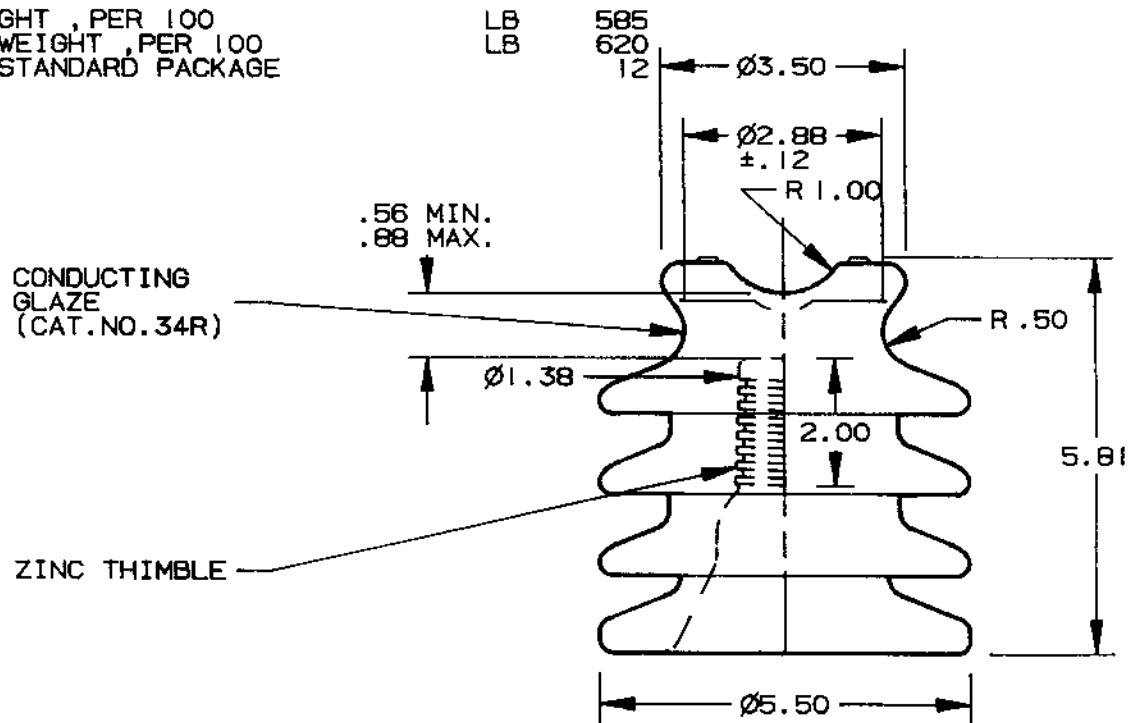

FILE 34 & 34R

	Victor Insulators, Inc.
	280 MAPLE AVENUE
	MAIL, P.O. BOX B, VICTOR, NEW YORK 14564 TELEPHONE: (716)924-2127

34 & 34R

4-7-95

TP