

19
20

DISTRIBUTION INS.
CAT. NOS. 8 & 8R
C-NECK 1" PINHOLE
ANSI CLASS 55-2

DIMENSIONS
LEAKAGE DISTANCE IN 5

MECHANICAL VALUES
CANTILEVER STRENGTH LB 2,500


ELECTRICAL VALUES
 60 HERTZ FLASHOVER - DRY kV 45
 60 HERTZ FLASHOVER - WET kV 25
 IMPULSE FLASHOVER - POS. kV 70
 IMPULSE FLASHOVER - NEG. kV 85
 60 HERTZ PUNCTURE VOLTAGE kV 70

RADIO INFLUENCE VOLTAGE DATA
 60 HERTZ TEST VOLTAGE RMS TO GRD. kV 5
 MAX. R.I.V. @ 1000 kHz
 FOR CAT. NO. 8 μV 2,500
 FOR CAT. NO. 8R μV 50

PACKING INFORMATION
 NET WEIGHT PER 100 LB 134
 PACKED WEIGHT PER 100 LB 142
 STANDARD PACKAGE 50

- Eng. Mgr. I
- Eng. 2
- Purch.
- Mktg. I
- Supt.
- Cost
- Prod.
- Insp.
- Glazing
- Bushing
- Making
- Ship
- Assem.
- Model
- Mach.
- 45
- Tooling
- Cer. Lab.
- El. Lab. I
- O.A.

This drawing is the property of Victor Insulators, Inc. and contains
 proprietary and confidential information which must not be duplicated,
 used, or disclosed other than as expressly authorized by Victor Insulators,
 Inc.

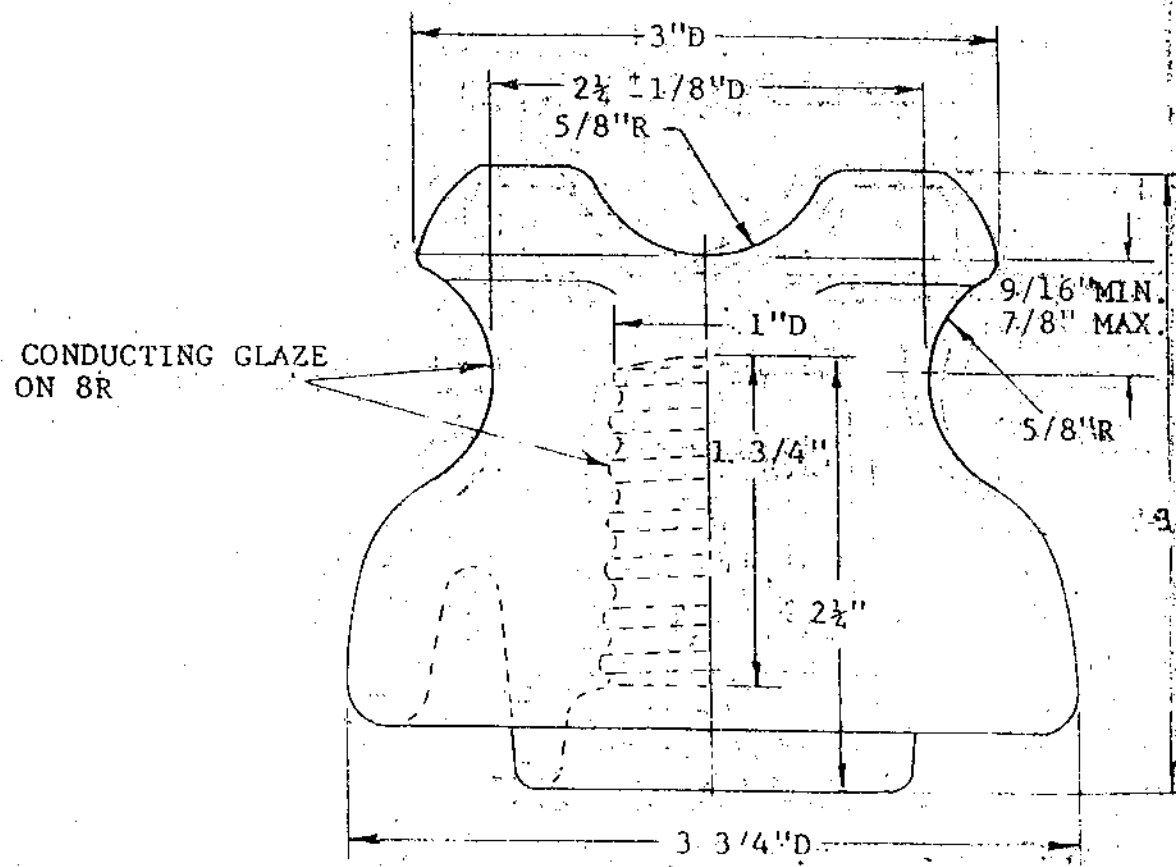

DWN. G.J.R.
6-28-84
APP. *RES*

Victor Insulators, Inc.
 280 Maple Avenue
 Mail: P.O. Box 8, Victor, New York 14564
 Telephone: (716) 924-2127

8 & 8R

SUPERSEDES DWG. 8 & 8R DATED 2-9-84