

25

POLYMER (SILICONE) INSULATOR
 CAT. NO. 8225
 25 kV ANSI CLASS DS-28

ENG. MGR
 ENG
 PURCH.
 MKTG.
 FLT. MGR.
 COST
 PROD.
 INSP
 GLAZE
 BUSHING
 MAKING
 SHIP
 ASSEM
 MODEL
 MACH.
 45
 TOOLING
 CER LAB
 EL LAB
 D. A.

DIMENSIONS

LEAKAGE DISTANCE IN 26
 DRY ARCING DISTANCE IN 12.5

MECHANICAL VALUES

SPECIFIED MECHANICAL LOAD LB 15,000
 TORSIONAL LOAD FT-LB 40

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY kV 130
 60 HERTZ FLASHOVER-WET kV 100
 IMPULSE FLASHOVER-POS. kV 190

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 20
 MAXIMUM RIV @ 1000 kHz μ V 10

PACKING INFORMATION

NET WEIGHT, EACH LB 2.9
 PACKED WEIGHT, EACH LB 3.3
 NO. IN STANDARD PACKAGE 15

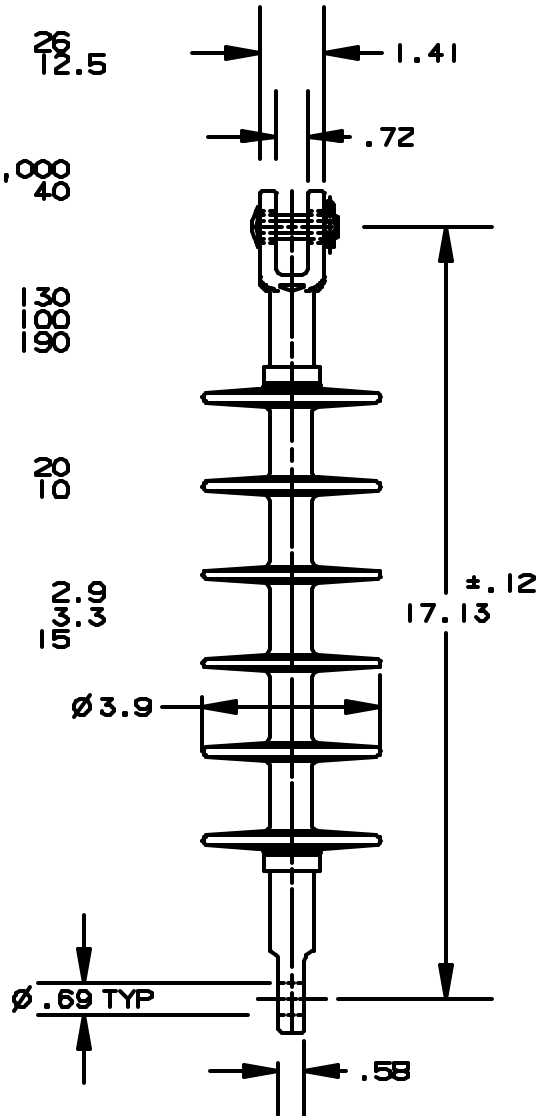

NOTE:
 THIS ASSEMBLY USES A GALVANIZED
 STEEL HEX COTTER BOLT AND A BRASS
 SPRING COTTER KEY.

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND CONTAINS
 PROPRIETARY AND CONFIDENTIAL INFORMATION
 WHICH MUST NOT BE DUPLICATED, USED,
 OR DISCLOSED OTHER THAN AS EXPRESSLY
 AUTHORIZED BY VICTOR INSULATORS, INC.

Victor Insulators, Inc.
 290 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716) 924-2127

8225

03-08-02 PPIAS