

30

STATION POST

CAT. NO. 1752

23 kV 150 kV BIL

TR. NO. 208

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 24

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT	LB	2,000
CANTILEVER STRENGTH, UNDERHUNG	LB	2,000
TENSION STRENGTH	LB	10,000
TORSION STRENGTH	IN-LB	8,000
COMPRESSION STRENGTH	LB	10,000

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS.	kV	170
60 HERTZ WITHSTAND-WET	kV	60
IMPULSE WITHSTAND	kV	150

RADIO INFLUENCE VOLTAGE DATA

RIV TEST VOLTAGE TO GROUND	kV	15
MAXIMUM RIV @ 1000 kHz	μV	100

PACKING INFORMATION

NET WEIGHT ,EACH	LB	26
PACKED WEIGHT ,EACH	LB	27
NO. IN STANDARD PACKAGE		2

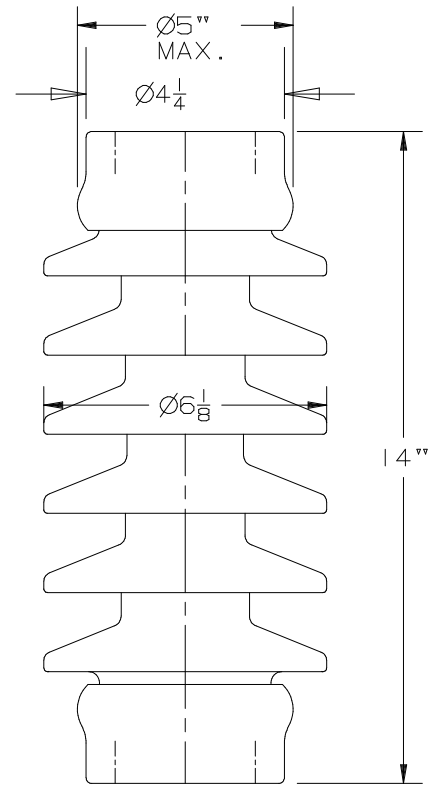

4 HOLES EACH END
1/2-13+.015" ON 3" B.C.

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 1752



Victor Insulators, Inc.

280 MAPLE AVENUE
VICTOR, NEW YORK 14564
TELEPHONE: (716)924-2127

1752

07-26-95

TP PP