

STATION POST	
CAT. NO. 1754	
46 kV	250 kV BIL
TR. NO. 214	
SOLID CORE PORCELAIN	

30

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE IN 43

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT	LB	2,000
CANTILEVER STRENGTH, UNDERHUNG	LB	2,000
TENSION STRENGTH	LB	14,000
TORSION STRENGTH	IN-LB	12,000
COMPRESSION STRENGTH	LB	15,000

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS.	kV	280
60 HERTZ WITHSTAND-WET	kV	100
IMPULSE WITHSTAND	kV	250

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	30
MAXIMUM RIV @ 1000 kHz	μV	200

PACKING INFORMATION

NET WEIGHT, EACH	LB	41
PACKED WEIGHT, EACH	LB	51
NO. IN STANDARD PACKAGE		1

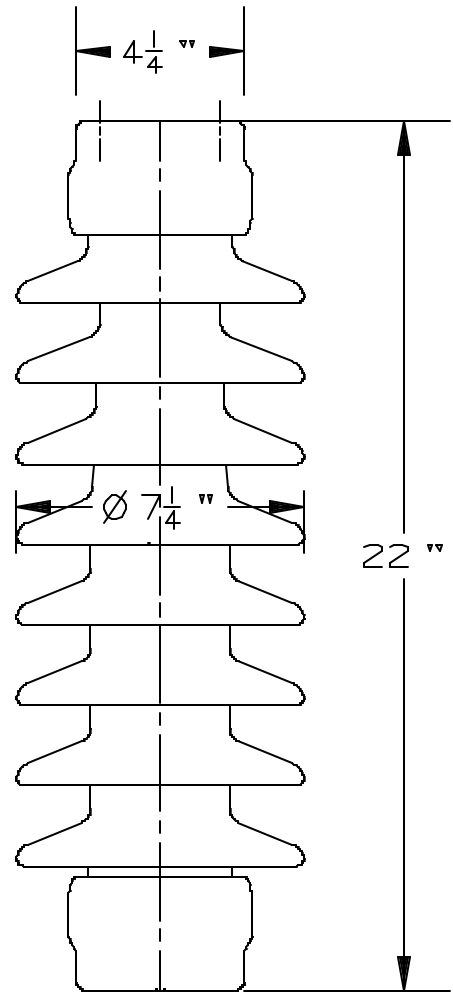

4 HOLES EACH END
1/2-13 +.015" ON Ø3" B.C.

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND CONTAINS
 PROPRIETARY AND CONFIDENTIAL INFORMATION
 WHICH MUST NOT BE DUPLICATED, USED,
 OR DISCLOSED OTHER THAN AS EXPRESSLY
 AUTHORIZED BY VICTOR INSULATORS, INC.

11-12-02

TM AS



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (585) 924-2127

1754