

STATION POST
CAT. NO. 1756
69kV 350kV BIL

DIMENSIONS

LEAKAGE DISTANCE IN 72

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT LB 1,500
 CANTILEVER STRENGTH, UNDERHUNG LB 1,500
 TENSION STRENGTH LB 16,000
 TORSION STRENGTH IN-LB 15,000
 COMPRESSION STRENGTH LB 25,000

ELECTRICAL VALUES


IMPULSE FLASHOVER - POS. kV 390
 60 HERTZ WITHSTAND - WET kV 145
 IMPULSE WITHSTAND kV 350

RADIO INFLUENCE VOLTAGE DATA

RIV TEST VOLTAGE TO GRD. kV 44
 MAX. RIV @ 1000 kHz μ V 200

PACKING INFORMATION

NET WEIGHT, EACH LB 92
 PACKED WEIGHT, EACH LB 100
 NO. IN STANDARD PACKAGE 1

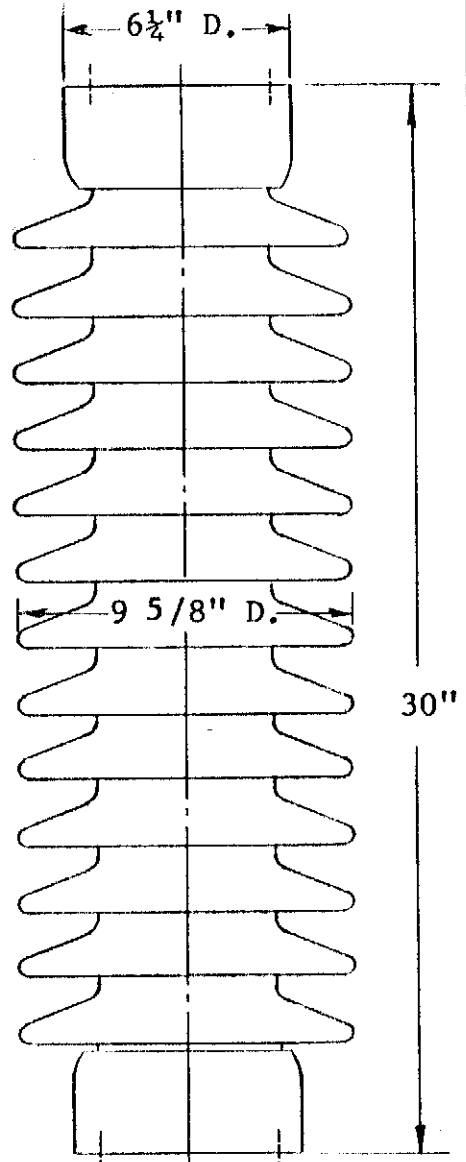

This print incorporates the latest revision
 BA 7-1-91
 E.g. Date Date

4 HOLES EACH END
 5/8-11+.015" on 5" B.C.

FILE 1756

DWN. G.J.R.
6-29-84
APP. AES

5-13-91 [Signature]

	Victor Insulators, Inc.
	280 Maple Avenue
	Mail: P.O. Box B, Victor, New York 14564
	Telephone: (716) 924-2127

1756
