

30

PIN TYPE INSULATOR	
CAT. NO. IIR	
J-NECK	1" PINHOLE
ANSI CLASS 55-6	

- 1 ENG. MGR.
- 2 ENG.
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP.
- GLAZE
- BUSHING
- MAKING
- SHIP.
- ASSEM.
- MODEL
- MACH.
- 45
- TOOLING
- CER. LAB.
- EL. LAB.
- D.A.

DIMENSIONS

LEAKAGE DISTANCE	IN	15
DRY ARCING DISTANCE	IN	8

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,000
---------------------	----	-------

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS.	kV	150
IMPULSE FLASHOVER-NEG.	kV	170
60 HERTZ FLASHOVER-WET	kV	50
60 HERTZ FLASHOVER-DRY	kV	100
60 HERTZ PUNCTURE VOLTAGE	kV	135

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	100
MAXIMUM RIV @ 1000 kHz	μV	22

PACKING INFORMATION

NET WEIGHT PER 100	LB	950
PACKED WEIGHT PER 100	LB	1,025
NO. IN STANDARD PACKAGE		6

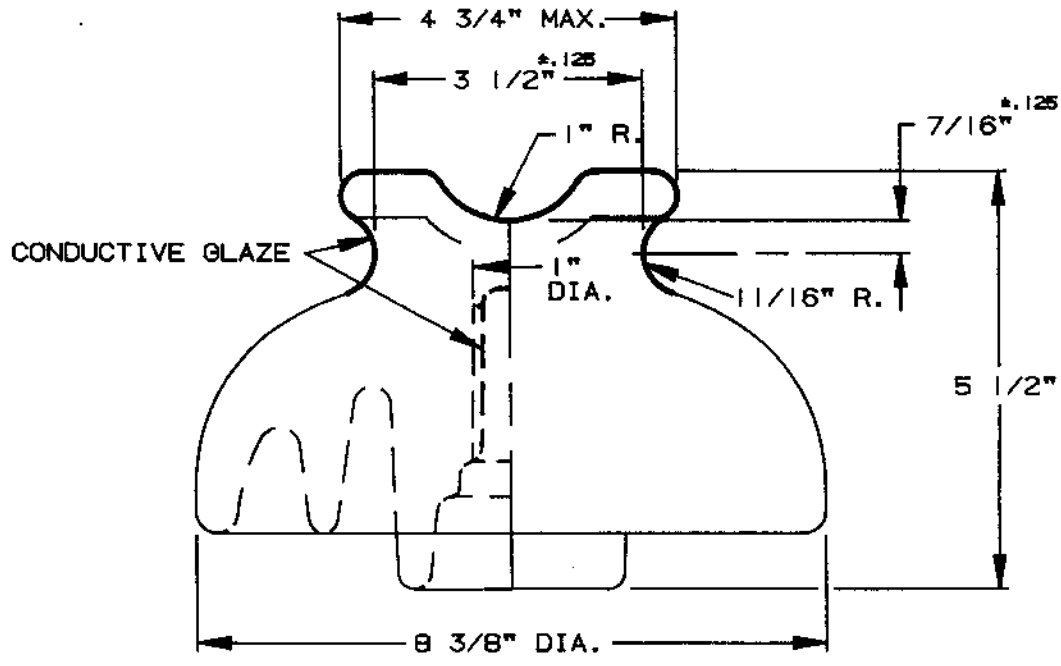

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS CONFIDENTIAL INFORMATION WHICH MUST NOT BE REPRODUCED, COPIED, DISCLOSED, EITHER IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF VICTOR INSULATORS, INC.

1-15-93 3-30-92	PP BA	A A		Victor Insulators, Inc. 280 MAPLE AVENUE MAIL: P.O. BOX 8, VICTOR, NEW YORK 14604 TELEPHONE: (716)824-2127	IIR
--------------------	----------	--------	--	---	-----