

30

HIGH VOLTAGE PIN TYPE

CAT. NO. 133 & 133R

"K NECK"

ANSI CLASS NO. 56-2

ENG. MGR  
 ENG  
 PURCH.  
 MKTG.  
 PLT. MGR.  
 COST  
 PROD.  
 INSP  
 GLAZE  
 BUSHING  
 MAKING  
 SHIP  
 ASSEM  
 MODEL  
 MACH.  
 45  
 TOOLING  
 CER LAB  
 EL LAB  
 Q. A.

DIMENSIONS

LEAKAGE DISTANCE	IN	17
DRY ARCING DISTANCE	IN	8.25
MINIMUM PIN HEIGHT	IN	7

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,000
---------------------	----	-------

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY	kV	110
60 HERTZ FLASHOVER-WET	kV	70
IMPULSE FLASHOVER-POS.	kV	175
IMPULSE FLASHOVER-NEG.	kV	225
60 HERTZ PUNCTURE VOLTAGE	kV	145

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE, RMS TO GRD.	kV	22
MAXIMUM RIV @ 1000 kHz, PLAIN	μV	12,000
RADIO FREED	μV	100

PACKING INFORMATION

NET WEIGHT PER 100	LB	925
PACKED WEIGHT PER 100	LB	1,050
NO. IN STANDARD PACKAGE		4

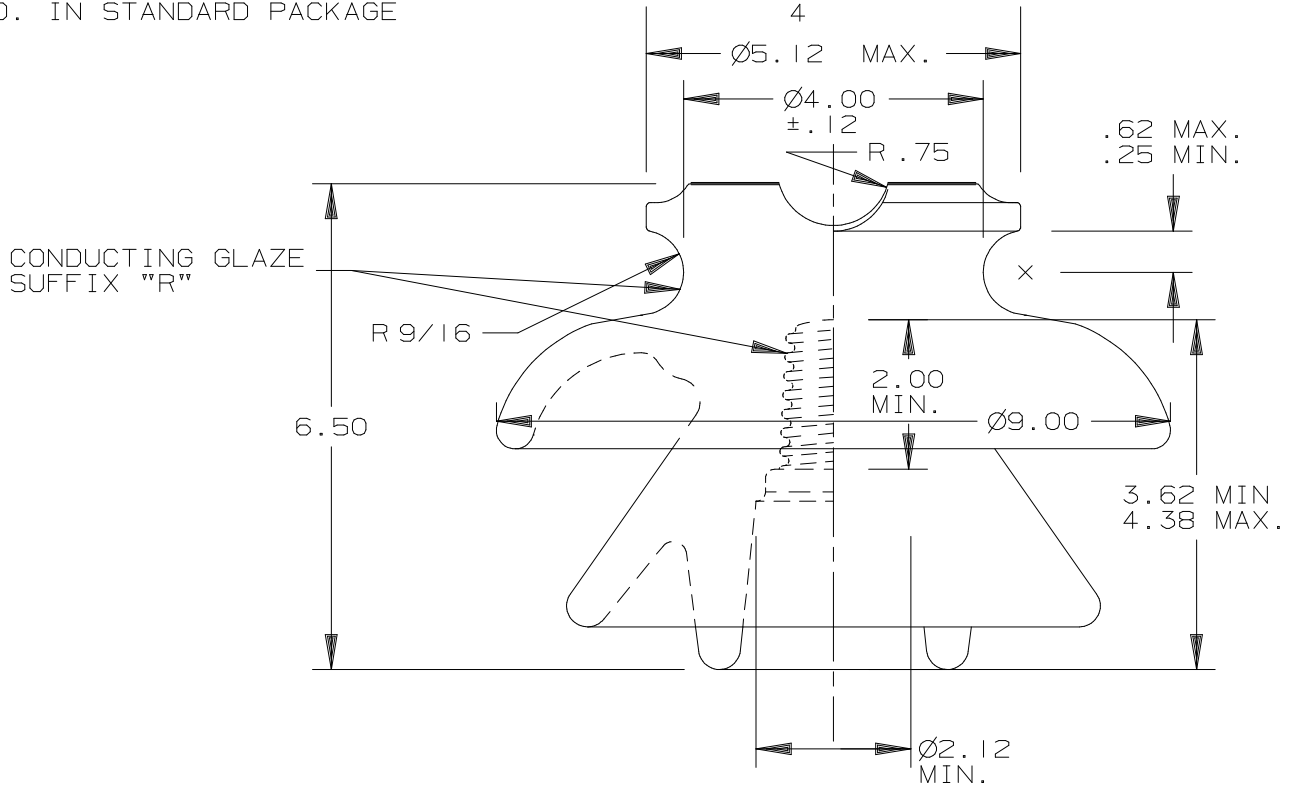

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE 133 & 133R

	<b>Victor Insulators, Inc.</b> 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (716)924-2127	133 & 133R
	4-25-95	TP PP AS