

30

PIN POST INSULATOR	
CAT. NO. 147R	
F-NECK	1" PINHOLE
34.5 kV	

1 ENG. MGR  
 2 ENG  
 PURCH.  
 1 MKTG.  
 PLT. MGR.  
 COST  
 PROD.  
 INSP  
 GLAZE  
 BUSHING  
 MAKING  
 SHIP  
 ASSEM  
 MODEL  
 MACH.  
 45  
 TOOLING  
 CER LAB  
 1 EL LAB  
 Q. A.

DIMENSIONS

LEAKAGE DISTANCE	IN	22.5
DRY ARCING DISTANCE	IN	11
MINIMUM PIN HEIGHT	IN	5

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,000
---------------------	----	-------

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY	kV	110
60 HERTZ FLASHOVER-WET	kV	85
IMPULSE FLASHOVER-POS.	kV	180
IMPULSE FLASHOVER-NEG.	kV	205
60 HERTZ PUNCTURE VOLTAGE	kV	160

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GND.	kV	22
MAXIMUM RIV @ 1000 kHz	$\mu$ V	100


PACKING INFORMATION

NET WEIGHT, PER 100	LB	1,150
PACKED WEIGHT, PER 100	LB	1,250
NO. IN STANDARD PACKAGE		4

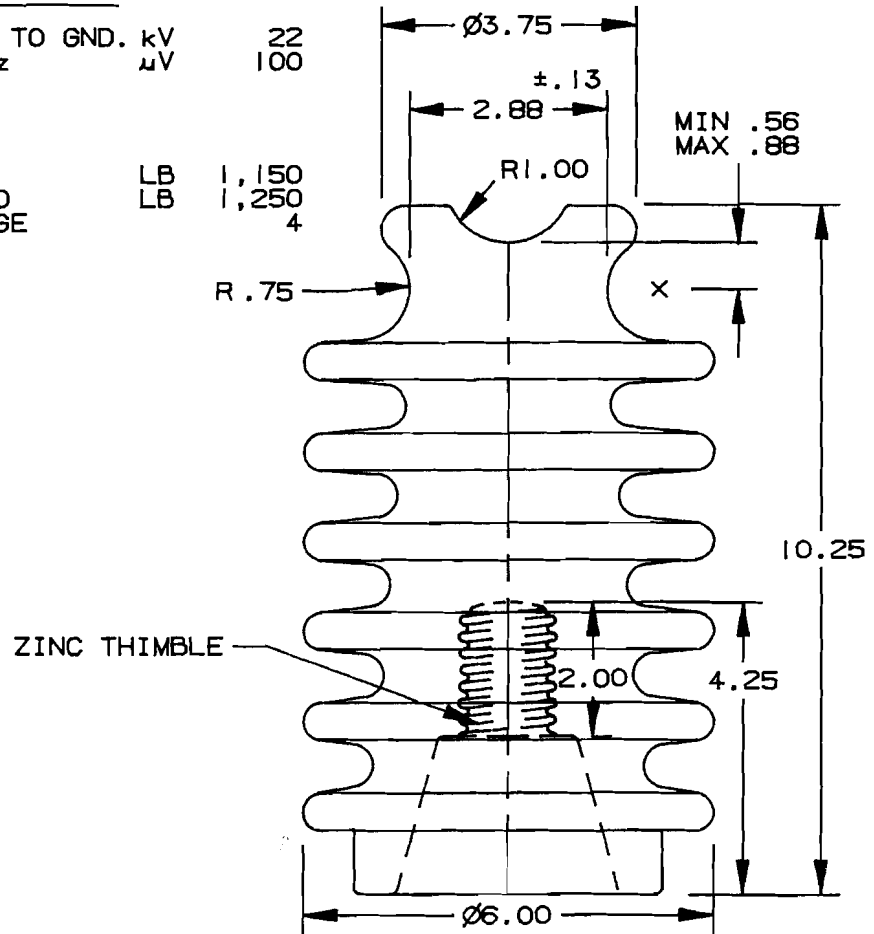

THIS DRAWING IS THE PROPERTY OF  
 VICTOR INSULATORS, INC. AND CONTAINS  
 PROPRIETARY AND CONFIDENTIAL INFORMATION  
 WHICH MUST NOT BE DUPLICATED, USED,  
 OR DISCLOSED OTHER THAN AS EXPRESSLY  
 AUTHORIZED BY VICTOR INSULATORS, INC.

FILE 147R

	Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 145664 TELEPHONE: (716)824-2127	147R
	12-12-96      MM <input type="checkbox"/>	