

30

PIN POST INSULATOR

CAT. NO. 148R

F-NECK 1.375" PINHOLE

34.5 kV

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTS.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE	IN	22.5
DRY ARCING DISTANCE	IN	11
MINIMUM PIN HEIGHT	IN	5

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,000
---------------------	----	-------

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY	kV	110
60 HERTZ FLASHOVER-WET	kV	85
IMPULSE FLASHOVER-POS.	kV	180
IMPULSE FLASHOVER-NEG.	kV	205
60 HERTZ PUNCTURE VOLTAGE	kV	160

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GND.	kV	22
MAXIMUM RIV @ 1000 kHz	$\mu$ V	100

PACKING INFORMATION

NET WEIGHT, PER 100	LB	1,150
PACKED WEIGHT, PER 100	LB	1,250
NO. IN STANDARD PACKAGE		4

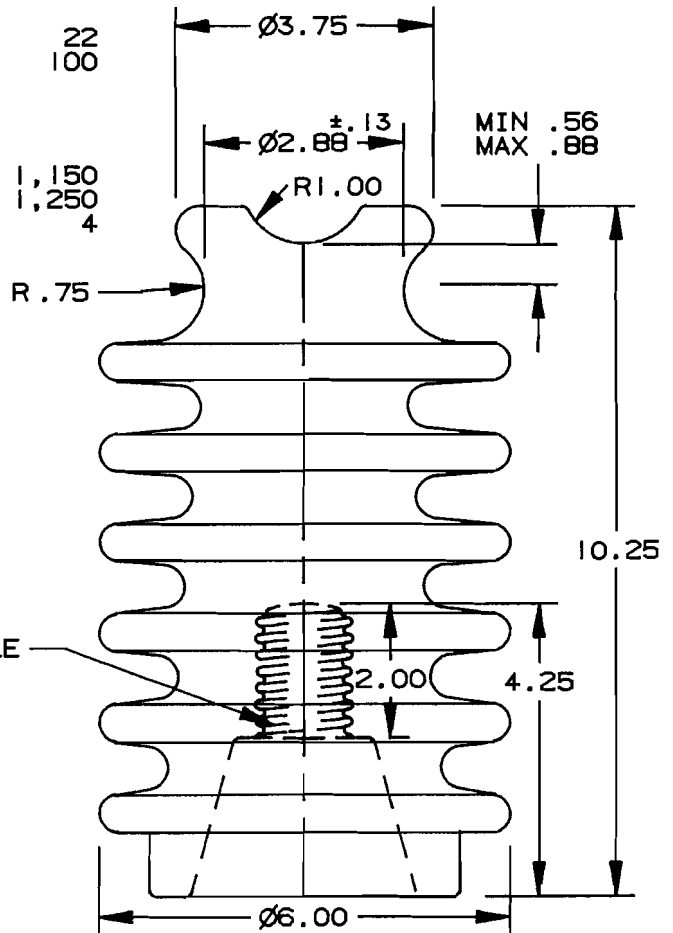

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE REPRODUCED, COPIED, OR DISCLOSED TO OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE 148R



Victor Insulators, Inc.  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (716)924-2127

148R

12-12-96

MM *[Signature]*