

30

STATION POST

161 kV

750 kV BIL

- 1 ENG. MGR.
- 2 ENG.
- 1 MKTG.
- 1 EL. LAB
- 1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE IN 116

MECHANICAL VALUES

CANTILEVER STRENGTH LB 1,200  
 TENSION STRENGTH LB 20,000  
 TORSION STRENGTH IN-LB 40,000  
 COMPRESSION STRENGTH LB 60,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS. kV 810  
 60 HERTZ WITHSTAND-WET kV 315  
 IMPULSE WITHSTAND kV 750


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 103  
 MAXIMUM RIV @ 1000 kHz  $\mu$ V 500

PACKING INFORMATION

NET WEIGHT , STACK LB 204  
 PACKED WEIGHT , STACK LB 216  
 NO. IN STANDARD PACKAGE 1/2

4 HOLES  
 $\frac{11}{16}$  - 11 ±.015 ON 5" B.C.

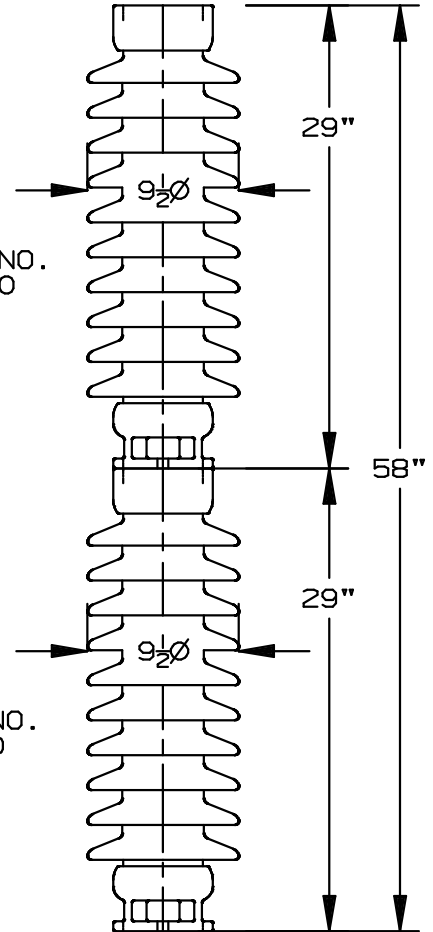

4 SLOTS  
 $\frac{11}{16}$ " WIDE ON 5" B.C.

REPLACEMENT FOR TR 25 CAP & PIN

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

8-8-01	TM	PP	RG	B	 Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (716)924-2127	1536
WAS SK-2-7-95 5-31-96		PP	AS	A		
2-27-95	TP					