

30

STATION POST
 CAT. NO. 1548
 TR. NO. 56

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE IN 70

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT LB 3,000
 CANTILEVER STRENGTH, UNDERHUNG LB 3,000
 TENSION STRENGTH LB 20,000
 TORSION STRENGTH IN-LB 40,000
 COMPRESSION STRENGTH LB 60,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS. kV 410
 60 HERTZ WITHSTAND-WET kV 160
 IMPULSE WITHSTAND kV 350


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 44
 MAXIMUM RIV @ 1000 KHz μ V 200

PACKING INFORMATION

NET WEIGHT ,EACH LB 91
 PACKED WEIGHT ,EACH LB 99
 NO. IN STANDARD PACKAGE 1

4 HOLES
 $\frac{5}{8}$ "-11 \pm .015 ON 5" B.C.

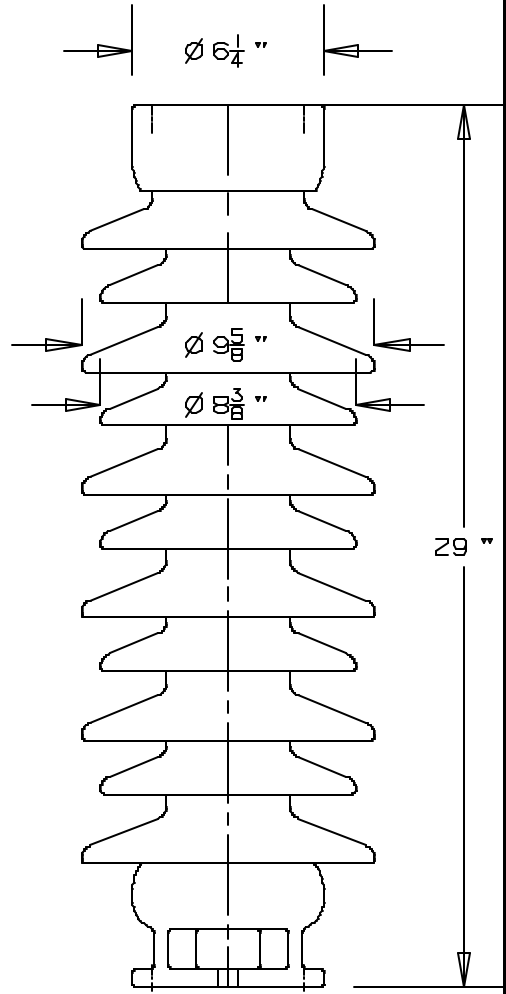

4 SLOTS
 $\frac{1}{16}$ " WIDE ON 5" B.C.

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND CONTAINS
 PROPRIETARY AND CONFIDENTIAL INFORMATION
 WHICH MUST NOT BE DUPLICATED, USED,
 OR DISCLOSED OTHER THAN AS EXPRESSLY
 AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 1548

03-07-03	TM		AS			Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (716)924-2127	1548
2-5-02	TM						