

30

STATION POST	
69 kV	350kV BIL
CAT. NO. 1590	

- 1 ENG. MGR.
- 2 ENG.
- 1 MKTG.
- 1 EL. LAB
- 1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE IN 58

MECHANICAL VALUES

CANTILEVER STRENGTH LB 3,000  
 TENSION STRENGTH LB 20,000  
 TORSION STRENGTH IN-LB 40,000  
 COMPRESSION STRENGTH LB 60,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS. kV 410  
 60 HERTZ WITHSTAND-WET kV 160  
 IMPULSE WITHSTAND kV 350


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 44  
 MAXIMUM RIV @ 1000 kHz  $\mu$ V 200

PACKING INFORMATION

NET WEIGHT , EACH LB 102  
 PACKED WEIGHT , EACH LB 108  
 NO. IN STANDARD PACKAGE 1

4 HOLES  
 $\frac{11}{16}$ "  $\pm$ .015 ON 5" B.C.

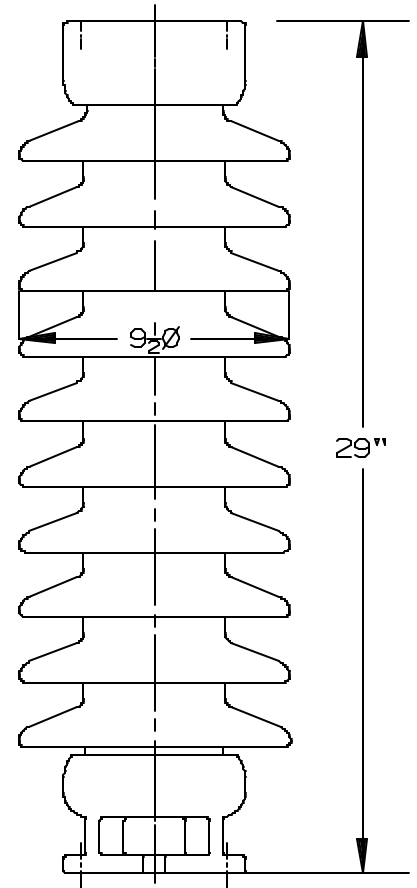

4 SLOTS  
 $\frac{11}{16}$ " WIDE ON 5" B.C.

REPLACEMENT FOR TR 56 CAP & PIN

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

8-9-01	TM		RG	B	 Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (716)924-2127	1590
WAS SK-2-9-95 5-31-96	RR	PP	AS	A		
2-27-95	TP					