

30

STATION POST	
230 kV	900 kV BIL
TR 175	

I ENG. MGR.
I ENG.
I MKTG.
I EL. LAB

DIMENSIONS

LEAKAGE DISTANCE IN 165

MECHANICAL VALUES

CANTILEVER STRENGTH LB 1,450
TENSION STRENGTH LB 25,000
TORSION STRENGTH IN-LB 90,000
COMPRESSION STRENGTH LB 75,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS. kV 1,010
60 HERTZ WITHSTAND-WET kV 385
IMPULSE WITHSTAND kV 900


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 125
MAXIMUM RIV @ 1000 kHz μ V 500

PACKING INFORMATION

NET WEIGHT , COLUMN LB 230
PACKED WEIGHT , COLUMN LB 254
NO. IN STANDARD PACKAGE 1

4 HOLES
5/8-11 ±.015 ON 5" B.C.

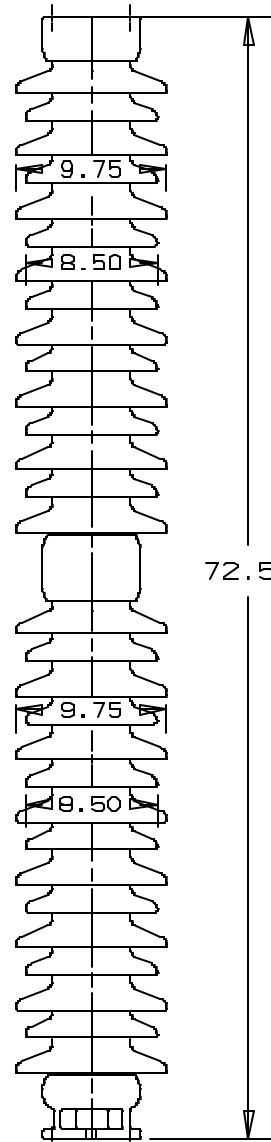

4 SLOTS
11/16" WIDE ON 5" B.C.

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 15PA38

04-01-03	TM	AS	B
04-25-02	PP	AS	A
05-29-01	PP		



Victor Insulators, Inc.
280 MAPLE AVENUE
VICTOR, NEW YORK 14564
TELEPHONE: (585)924-2127

15PA38