

30

STATION POST	
CAT. NO.	16PA12
500 kV	1470 kV BIL
TR. NO. 372	

- 1 ENG. MGR.
- 2 ENG.
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP.
- GLAZE
- BUSHING
- MAKING
- SHIP.
- ASSEM.
- MODEL
- MACH.
- 45
- TOOLING
- CER. LAB.
- 1 EL. LAB.
- 1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE IN 264

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	1,750
TENSILE STRENGTH	LB	40,000
TORSION STRENGTH	IN-LB	120,000
COMPRESSION STRENGTH	LB	100,000

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS.	kV	1,610
60 HERTZ WITHSTAND-WET	kV	590
IMPULSE WITHSTAND	kV	1,470

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	220
MAXIMUM RIV @ 1000 kHz	μV	1,000

PACKING INFORMATION

NET WEIGHT ,STACK	LB	595
PACKED WEIGHT ,STACK	LB	620
NO. IN STANDARD PACKAGE		2

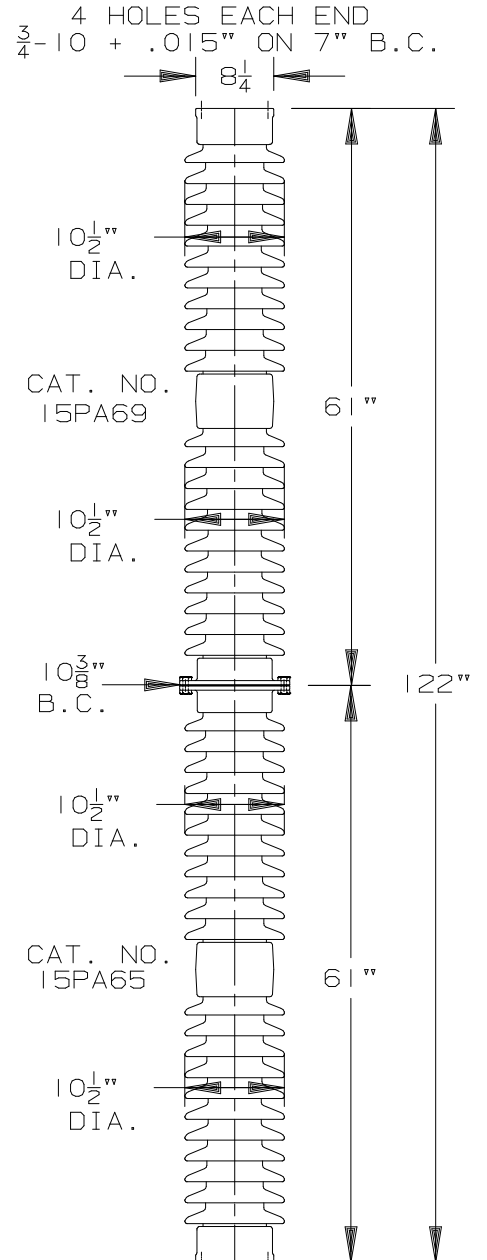

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

7-24-01	TM	PP	AS	B
05-05-99	DF	PP		A
05-09-94	RR	PP		



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

16PA12