

**STATION POST**


CAT. NO. 16PT01

345 kV

1300 kV BIL

TR NO. 367

4 HOLES 5/8"-11 +.015  
ON 5" B.C.

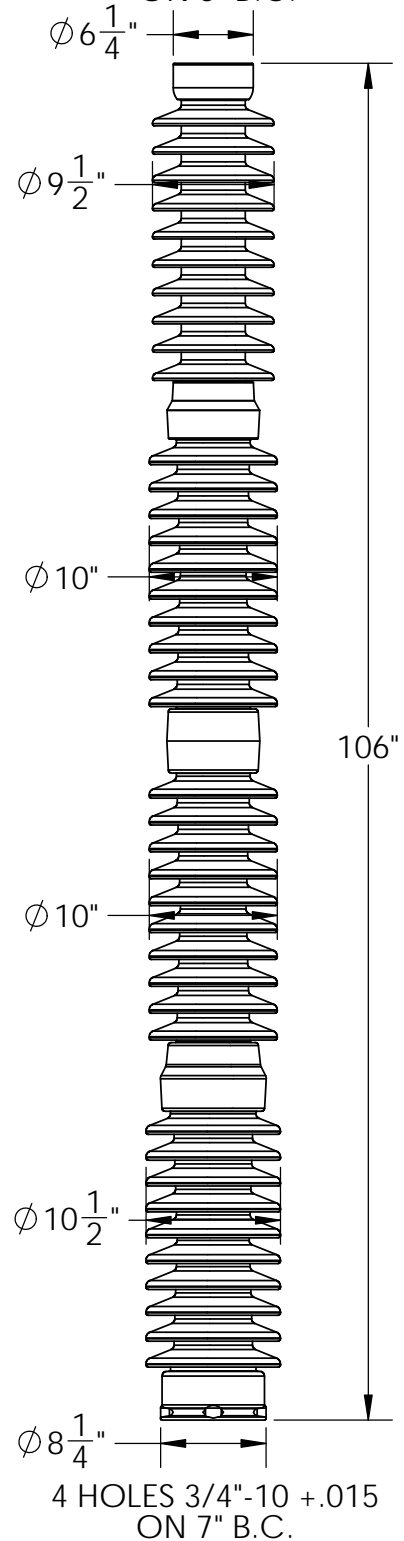

DIMENSIONS:  
LEAKAGE DISTANCE IN 231

MECHANICAL VALUES:

CANTILEVER STRENGTH LB 1,450  
TENSION STRENGTH LB 20,000  
TORSION STRENGTH IN-LB 40,000  
COMPRESSION STRENGTH LB 60,000

ELECTRICAL VALUES:

IMPULSE FLASHOVER-POSITIVE kV 1,410  
60 HERTZ WITHSTAND-WET kV 525  
IMPULSE WITHSTAND kV 1,300

RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND kV 220  
MAXIMUM R.I.V. @ 1000 kHz  $\mu$ V 1,000

PACKAGING INFORMATION:

NET WEIGHT, LB 455  
PACKED WEIGHT LB 490  
NO. IN STANDARD PACKAGE 1

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

**APPROVED**  
By A. E. Schwalm at 8:50 am, Oct 15, 2015



**Victor Insulators, Inc.**  
280 Maple Avenue  
Victor, New York 14564  
Telephone: (585)924-2127  
www.victorinsulators.com

**16PT01**

10-13-15

TM

SUPERSEDES 16PT01 DATED 05-04-99