

30

STATION POST

CAT. NO. 1720

115 kV 550 kV BIL

TR. NO. 286

SOLID CORE PORCELAIN

DIMENSIONS

LEAKAGE DISTANCE IN 116

MECHANICAL VALUES

CANTILEVER STRENGTH LB 1,700  
 TENSION STRENGTH LB 20,000  
 TORSION STRENGTH IN-LB 40,000  
 COMPRESSION STRENGTH LB 60,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS. kV 610  
 60 HERTZ WITHSTAND-WET kV 230  
 IMPULSE WITHSTAND kV 550


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD. kV 73  
 MAXIMUM RIV @ 1000 kHz  $\mu$ V 200

PACKING INFORMATION

NET WEIGHT, COLUMN LB 138  
 PACKED WEIGHT, COLUMN LB 159  
 NO. IN STANDARD PACKAGE 1

4 HOLES EACH END  
 $\frac{5}{8}$ -11 +.015" ON 5" B.C.

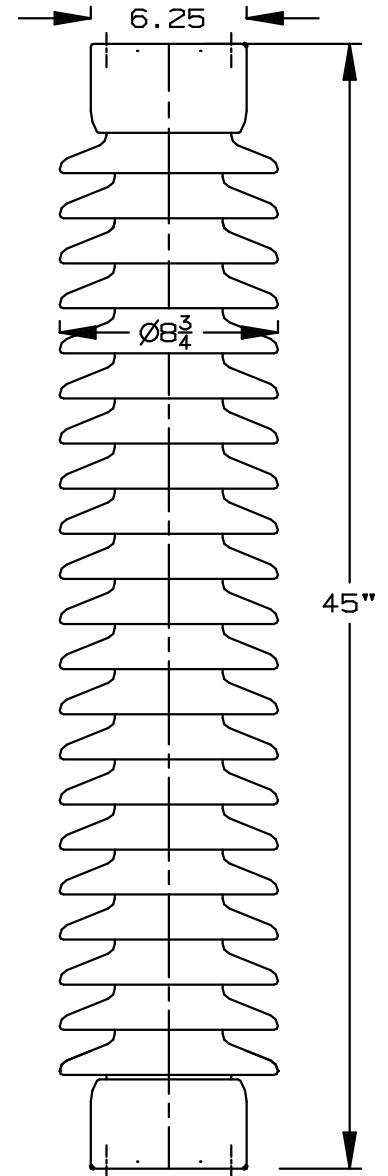

APPROVED  
 By A. E. Schwalm at 10:07 am, May 01, 2013

THIS DRAWING IS THE PROPERTY OF  
 VICTOR INSULATORS, INC. AND CONTAINS  
 PROPRIETARY AND CONFIDENTIAL INFORMATION  
 WHICH MUST NOT BE DUPLICATED, USED,  
 OR DISCLOSED OTHER THAN AS EXPRESSLY  
 AUTHORIZED BY VICTOR INSULATORS, INC.

05-01-13		TM		 Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (585)924-2127	1720
10-03-02	TM	AS			
08-23-01	TM	PP AS			