

30

STATION POST

CAT. NO. 1721

138 kV 650 kV BIL

TR. NO. 288

SOLID CORE PORCELAIN

- 1 ENG. MGR.
- 1 ENG.
- PURCH.
- MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP.
- GLAZE
- BUSHING
- MAKING
- SHIP.
- ASSEM.
- MODEL
- MACH.
- 45
- TOOLING
- CER. LAB.
- 1 EL. LAB.
- Q.A.

DIMENSIONS

LEAKAGE DISTANCE IN 132

MECHANICAL VALUES

CANTILEVER STRENGTH LB 1,450
 TENSILE STRENGTH LB 20,000
 TORSION STRENGTH IN-LB 40,000
 COMPRESSION STRENGTH LB 60,000

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS. kV 710
 60 HERTZ WITHSTAND-WET kV 275
 IMPULSE WITHSTAND kV 650

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD. kV 88
 MAXIMUM RIV @ 1000 kHz uV 200

PACKING INFORMATION

NET WEIGHT, EACH LB 156
 PACKED WEIGHT, EACH LB 168
 NO. IN STANDARD PACKAGE 1

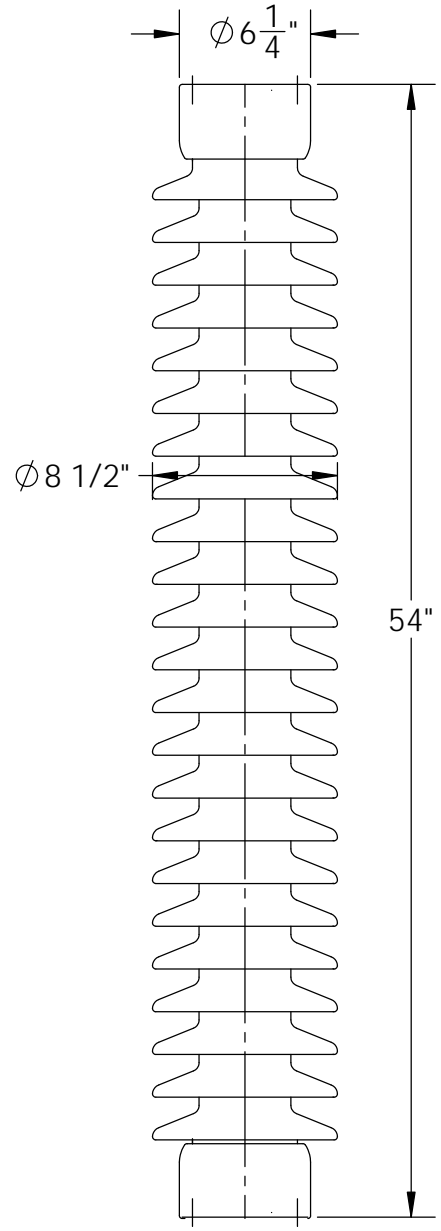

4 HOLES EACH END
 5/8-11 +.015" ON 5" B.C.

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
 By A. E. Schwalm at 8:57 am, Dec 31, 2014

12-31-14		TM	
10-03-02	TM		AS
11-06-01		PP	AS
12-18-00	TM	PP	RG



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (585)924-2127

1721