

TIE TOP LINE POST

CAT. NO. 2025

"F NECK

23 kV ANSI 57-1

30

1 ENG. MGR
 2 ENG
 PURCH.
 1 MKTG.
 PLT.MGR.
 COST
 PROD.
 INSP
 GLAZE
 BUSHING
 MAKING
 SHIP
 ASSEM
 MODEL
 MACH.
 45
 TOOLING
 CER LAB
 1 EL LAB
 Q. A.

DIMENSIONS

| | | |
|------------------|----|-------|
| LEAKAGE DISTANCE | IN | 14 |
| DRY ARC DISTANCE | IN | 6 1/2 |

MECHANICAL VALUES

| | | |
|---------------------|----|------|
| CANTILEVER STRENGTH | LB | 2800 |
|---------------------|----|------|

ELECTRICAL VALUES


| | | |
|------------------------|----|-----|
| 60 HERTZ FLASHOVER-DRY | kV | 70 |
| 60 HERTZ FLASHOVER-WET | kV | 50 |
| IMPULSE FLASHOVER-POS. | kV | 120 |

RADIO INFLUENCE VOLTAGE DATA

| | | |
|------------------------|----|-----|
| 60 HERTZ TEST VOLTAGE | kV | 15 |
| MAXIMUM RIV @ 1000 kHz | μV | 100 |

PACKING INFORMATION

| | | |
|-------------------------|----|------|
| NET WEIGHT PER 100 | LB | 1200 |
| PACKED WEIGHT PER 100 | LB | 1350 |
| NO. IN STANDARD PACKAGE | | 3 |

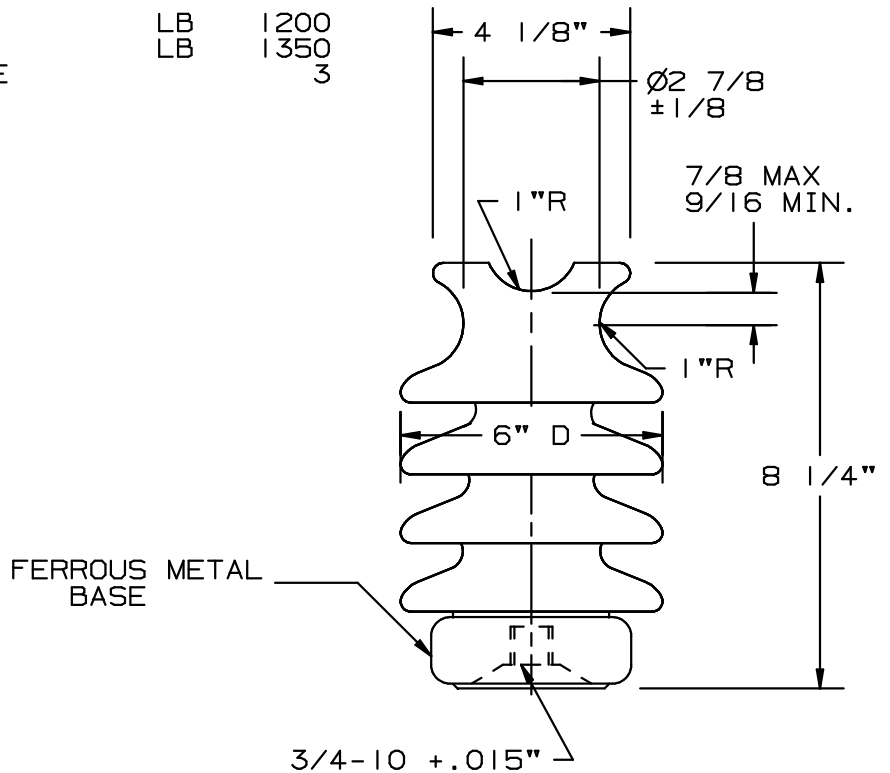

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND CONTAINS
 PROPRIETARY AND CONFIDENTIAL INFORMATION
 WHICH MUST NOT BE DUPLICATED, USED,
 OR DISCLOSED OTHER THAN AS EXPRESSLY
 AUTHORIZED BY VICTOR INSULATORS, INC.



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

2025

7-25-96

MM PP AS