

30

LINE POST
 CAT. NO. 2127
 27 kV "F" NECK

ENG. MGR
 ENG
 PURCH.
 MKTG.
 PLT. MGR.
 COST
 PROD.
 INSP
 GLAZE
 BUSHING
 MAKING
 SHIP
 ASSEM
 MODEL
 MACH.
 45
 TOOLING
 CER LAB
 EL LAB
 Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 15
 DRY ARCHING DISTANCE IN 7.75

MECHANICAL VALUES

CANTILEVER STRENGTH LB 1,500

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY kV 95
 60 HERTZ FLASHOVER-WET kV 65
 IMPULSE FLASHOVER-POS. kV 135
 IMPULSE FLASHOVER-NEG. kV 190

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 20
 MAXIMUM RIV @ 1000 kHz μ V 50

PACKING INFORMATION

NET WEIGHT , PER 100 LB 969
 PACKED WEIGHT , PER 100 LB 1,044
 NO. IN STANDARD PACKAGE 6

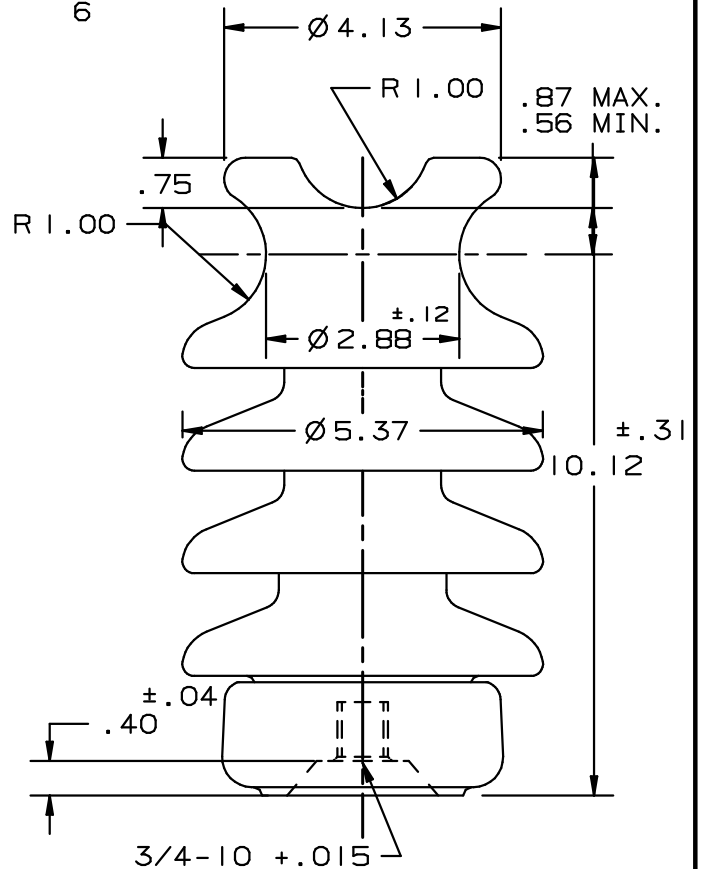

APPROVED
 By A. E. Schwalm at 11:23 am, May 01, 2012

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

04-24-12	ADDED DIM	TM		D
05-29-09	REV'D OAL TOLERANCE	TM		C
05-12-09	REV'D OAL	TM		B
03-23-09	REV'D OAL	TM		A
04-02-96		RR	PPAS	



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (585)924-2127

2127