

30

LINE POST	
CAT. NO. 2137	
27 kV	"C" NECK

ENG. MGR  
 ENG  
 PURCH.  
 MKTG.  
 PLT.MGR.  
 COST  
 PROD.  
 INSP  
 GLAZE  
 BUSHING  
 MAKING  
 SHIP  
 ASSEM  
 MODEL  
 MACH.  
 45  
 TOOLING  
 CER LAB  
 EL LAB  
 Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 15  
 DRY ARCING DISTANCE IN 7.75

MECHANICAL VALUES

CANTILEVER STRENGTH LB 1,500

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY kV 95  
 60 HERTZ FLASHOVER-WET kV 65  
 IMPULSE FLASHOVER -POS. kV 135  
 IMPULSE FLASHOVER -NEG. kV 190

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 20  
 MAXIMUM RIV @ 1000 kHz  $\mu$ V 50

PACKING INFORMATION

NET WEIGHT PER 100 LB 969  
 PACKED WEIGHT PER 100 LB 1,044  
 NO. IN STANDARD PACKAGE 3

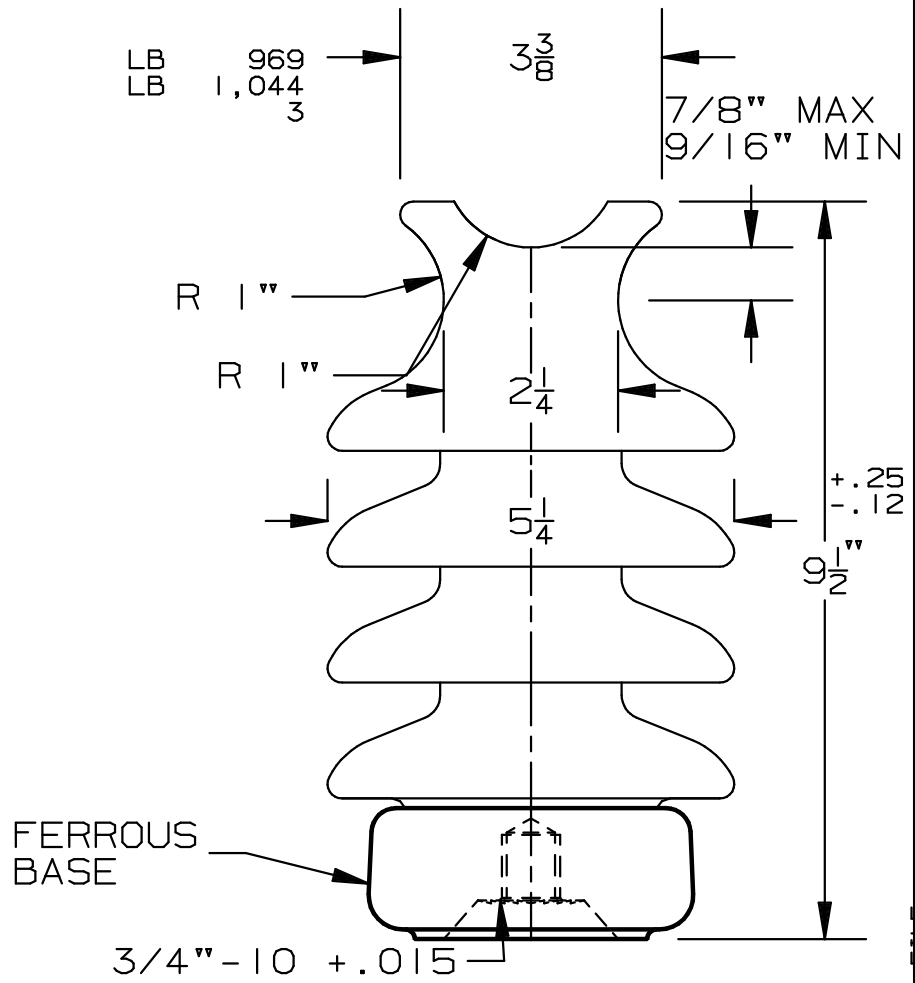

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED  
 By A. E. Schwalm at 10:42 am, Mar 28, 2013

03-27-13	DRAWN TO SCALE	TM			C
05-29-09	REV'D OAL TOLERANCE	TM			B
05-12-09	REV'D OAL	TM			A
01-04-01		TP	PP	AS	

 Victor Insulators, Inc.  
 280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (585)924-2127

2137

2137 FILE: