

19

DIMENSIONS

LEAKAGE DISTANCE	IN	13
DRY ARCING DISTANCE	IN	6 3/4
RECOMMENDED PIN HEIGHT	IN	7

PIN TYPE INSULATOR

LONG LEAKAGE

CAT. NO. 33/33R

F NECK 1" PIN HOLE

MECHANICAL VALUES

CANTILEVER STRENGTH LB 3000

ELECTRICAL VALUES

60 HERTZ FLASHOVER - DRY	kV	85
60 HERTZ FLASHOVER - WET	kV	60
IMPULSE FLASHOVER - POS.	kV	140
IMPULSE FLASHOVER - NEG.	kV	170
60 HERTZ PUNCTURE VOLTAGE	kV	115


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	15
MAXIMUM RIV @ 1000 kHz - PLAIN	uV	8000
RADIO FREED	uV	100

PACKING INFORMATION

NET WEIGHT PER 100	LB	531
PACKED WEIGHT PER 100	LB	566
NO. IN STANDARD PACKAGE		12

Eng. Mgr. |
 Eng. 2 |
 Purch. |
 Mktg. |
 Supt. |
 Cost |
 Prod. |
 Insp. |
 Glazing |
 Bushing |
 Making |
 Ship |
 Assem. |
 Model |
 Mach. |
 45 |
 Tooling |
 Cer. Lab. |
 El. Lab. |
 Q.A. |

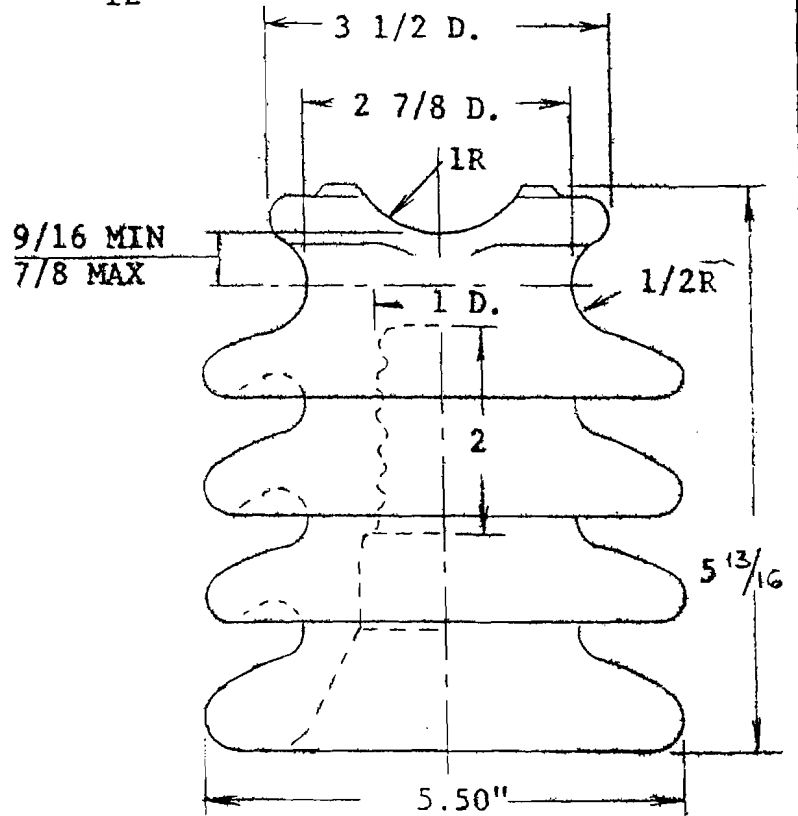

This drawing is the property of Victor Insulators, Inc. and contains proprietary and confidential information which must not be duplicated, used, or disclosed other than as expressly authorized by Victor Insulators, Inc.

supersedes 04/1 dated 2-5-69

REV 0 8-6-91 31/15
 Drn nfc 9-26-86 App



Victor Insulators, Inc.
 280 Maple Avenue
 Mail: P.O. Box B, Victor, New York 14564
 Telephone: (716) 924-2127

33/33R