

19

PIN POST INSULATOR
CAT. NO. 34 & 34R
F-NECK 1.375" PINHOLE
LONG LEAKAGE

ENG. MGR
 ENG
 PURCH.
 MKTG.
 PLT. MGR.
 COST
 PROD.
 INSP
 GLAZE
 BUSHING
 MAKING
 SHIP
 ASSEM
 MODEL
 MACH.
 45
 TOOLING
 CER LAB
 EL LAB
 G. A.

DIMENSIONS

LEAKAGE DISTANCE	IN	13
DRY ARCING DISTANCE	IN	6.75
MINIMUM PIN HEIGHT	IN	7

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,000
---------------------	----	-------

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY	kV	85
60 HERTZ FLASHOVER-WET	kV	60
IMPULSE FLASHOVER-POS.	kV	140
IMPULSE FLASHOVER-NEG.	kV	170
60 HERTZ PUNCTURE VOLTAGE	kV	115

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE, RMS TO GRD.	kV	15
MAXIMUM RIV @ 1000 KHz		
RADIO FREED	μV	100
PLAIN	μV	8,000

PACKING INFORMATION

NET WEIGHT, PER 100	LB	585
PACKED WEIGHT, PER 100	LB	620
NO. IN STANDARD PACKAGE		12

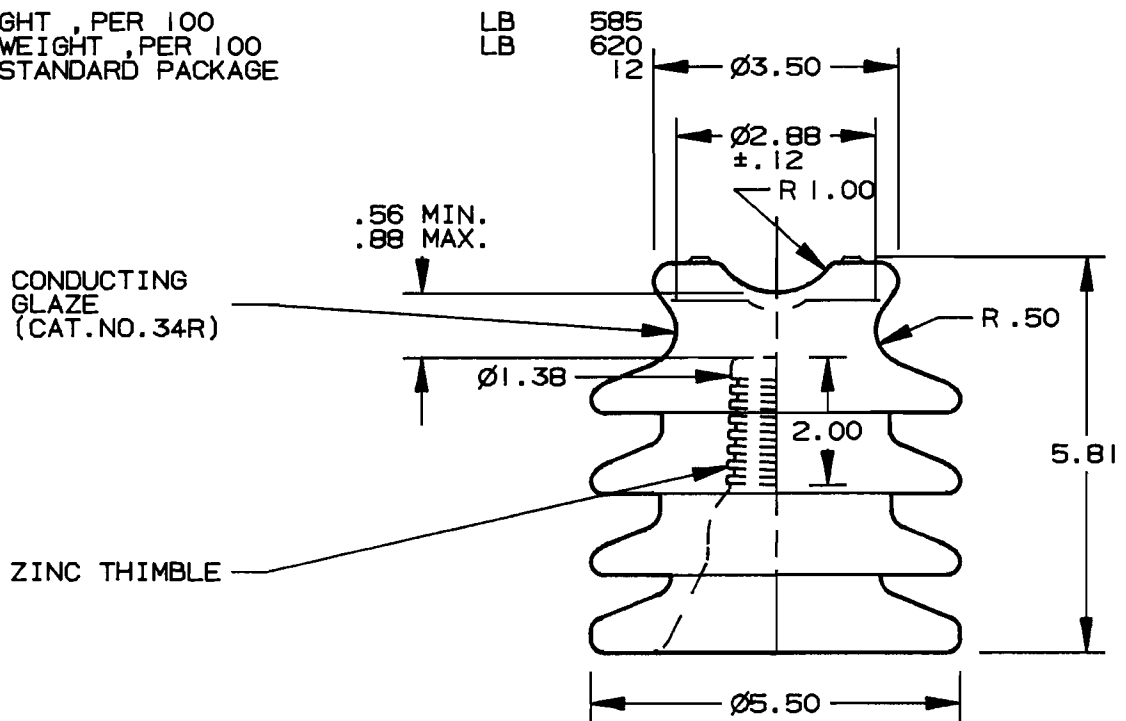

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE REPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 34 & 34R

	Victor Insulators, Inc. 280 MAPLE AVENUE MAIL: P.O. BOX 8, VICTOR, NEW YORK 14584 TELEPHONE: (716)924-2127	34 & 34R
	4-7-95 TP	