

FOG BOWL INSULATOR

CAT. NO. 40R

F-NECK 1 3/8" PINHOLE

19

ENG. MGR  
 ENG  
 PURCH.  
 MKTG.  
 PLT. MGR.  
 COST  
 PROD.  
 INSP  
 GLAZE  
 BUSHING  
 MAKING  
 SHIP  
 ASSEM  
 MODEL  
 MACH.  
 45  
 TOOLING  
 CER LAB  
 EL LAB  
 Q. A.

DIMENSIONS

LEAKAGE DISTANCE	IN	16.5
DRY ARCING DISTANCE	IN	7.25
MINIMUM PIN HEIGHT	IN	7

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,000
---------------------	----	-------

ELECTRICAL VALUES


60 HERTZ FLASHOVER - DRY	kV	100
60 HERTZ FLASHOVER - WET	kV	50
IMPULSE FLASHOVER - POS.	kV	160
IMPULSE FLASHOVER - NEG.	kV	140
60 HERTZ PUNCTURE VOLTAGE	kV	140

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE RMS TO GRD.	kV	15
MAXIMUM RIV @ 1000 kHz	μV	100

PACKING INFORMATION

NET WEIGHT, PER 100	LB	720
PACKED WEIGHT, PER 100	LB	800
NO. IN STANDARD PACKAGE		4

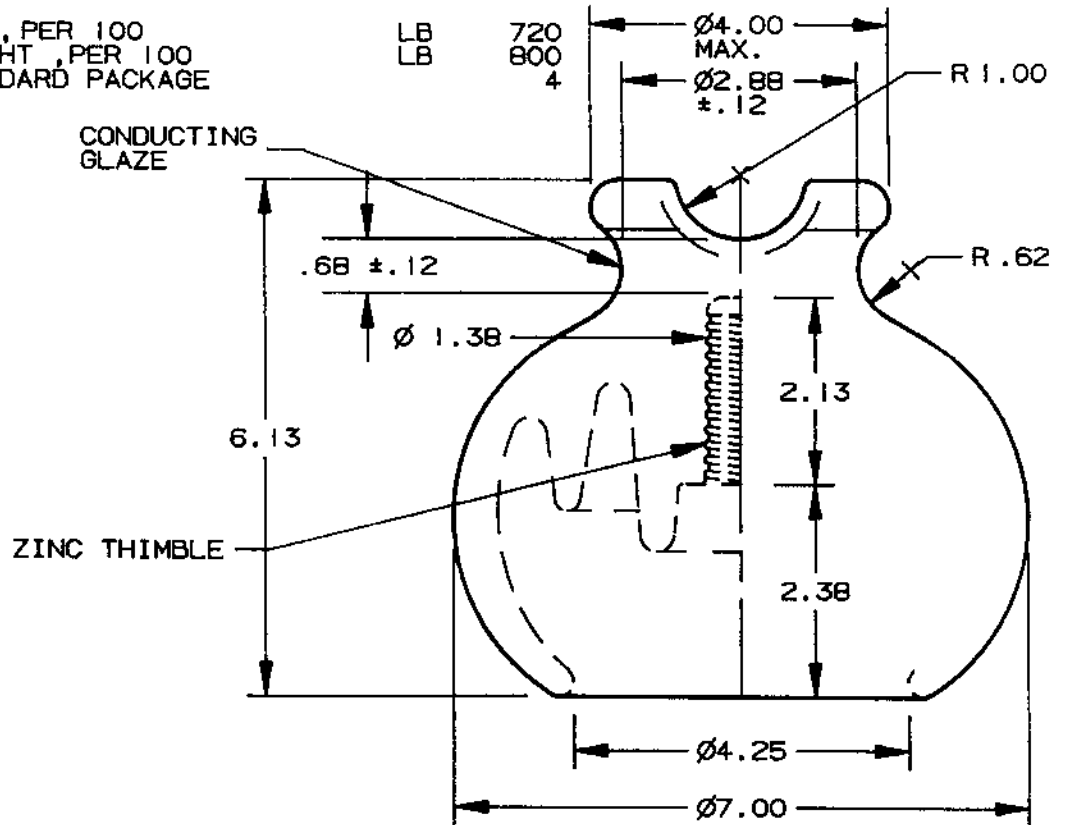

THIS DRAWING IS THE PROPERTY OF  
 VICTOR INSULATORS, INC. AND CONTAINS  
 CONFIDENTIAL AND PROPRIETARY INFORMATION  
 WHICH MUST NOT BE REPRODUCED, COPIED,  
 OR DISCLOSED OTHER THAN AS EXPRESSLY  
 AUTHORIZED BY VICTOR INSULATORS, INC.



Victor Insulators, Inc.  
 280 MAPLE AVENUE  
 MAIL: P.O. BOX 8, VICTOR, NEW YORK 14584  
 TELEPHONE: (716)924-2127

40R

4-25-95

TP [Signature]