

19

DISTRIBUTION INSULATOR

CAT. NO. 5R

C-NECK 1" PINHOLE

ANSI CLASS 55-3

ENG. MGR
 ENG
 PURCH.
 MKTG.
 PLT. MGR.
 COST
 PROD.
 INSP
 GLAZE
 BUSHING
 MAKING
 SHIP
 ASSEM
 MODEL
 MACH.
 45
 TOOLING
 CER LAB
 EL LAB
 Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 7

MECHANICAL VALUES

CANTILEVER STRENGTH LB 2,500

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY kV 55
 60 HERTZ FLASHOVER-WET kV 30
 IMPULSE FLASHOVER-POS. kV 90
 IMPULSE FLASHOVER-NEG. kV 110
 60 HERTZ PUNCTURE VOLTAGE kV 90

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD. kV 10
 MAXIMUM RIV @ 1000 kHz μ V 50

PACKING INFORMATION

NET WEIGHT PER 100 LB 229
 PACKED WEIGHT PER 100 LB 241
 NO. IN STANDARD PACKAGE 18

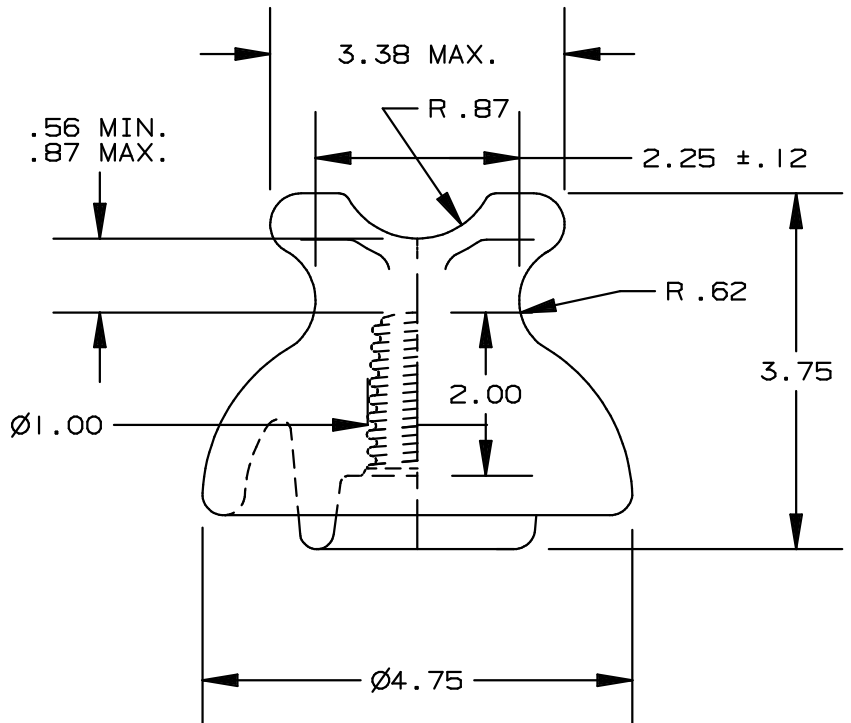

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 5R



Victor Insulators, Inc.

280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

5R

4-25-95

TP P P AS