

30

CLAMP TOP LINE POST

VERTICAL MOUNTING

69kV CAT. NO. 62158

ANSI CLASS 57-15

- 1 ENG. MGR.
- 2 ENG.
- PURCH.
- 1 MKTG.
- COST
- PROD.
- INSP.
- GLAZE
- BUSHING
- MAKING
- SHIP.
- ASSEM.
- MODEL
- MACH.
- 45
- TOOLING
- CER. LAB.
- 1 EL. LAB.
- Q.A.

DIMENSIONS

LEAKAGE DISTANCE IN 45  
 DRY ARCING DISTANCE IN 17 1/4

MECHANICAL VALUES

CANTILEVER STRENGTH LB 2,800

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY kV 160  
 60 HERTZ FLASHOVER-WET kV 130  
 IMPULSE FLASHOVER -POS kV 265

RADIO INFLUENCE VOLTAGE DATA


60 HERTZ TEST VOLTAGE kV 44  
 RMS TO GROUND μV 200  
 MAXIMUM RIV @ 1000 kHz

PACKING INFORMATION

NET WEIGHT PER 100 LB 5075  
 PACKED WEIGHT PER 100 LB 5375  
 NO. IN STANDARD PACKAGE 1

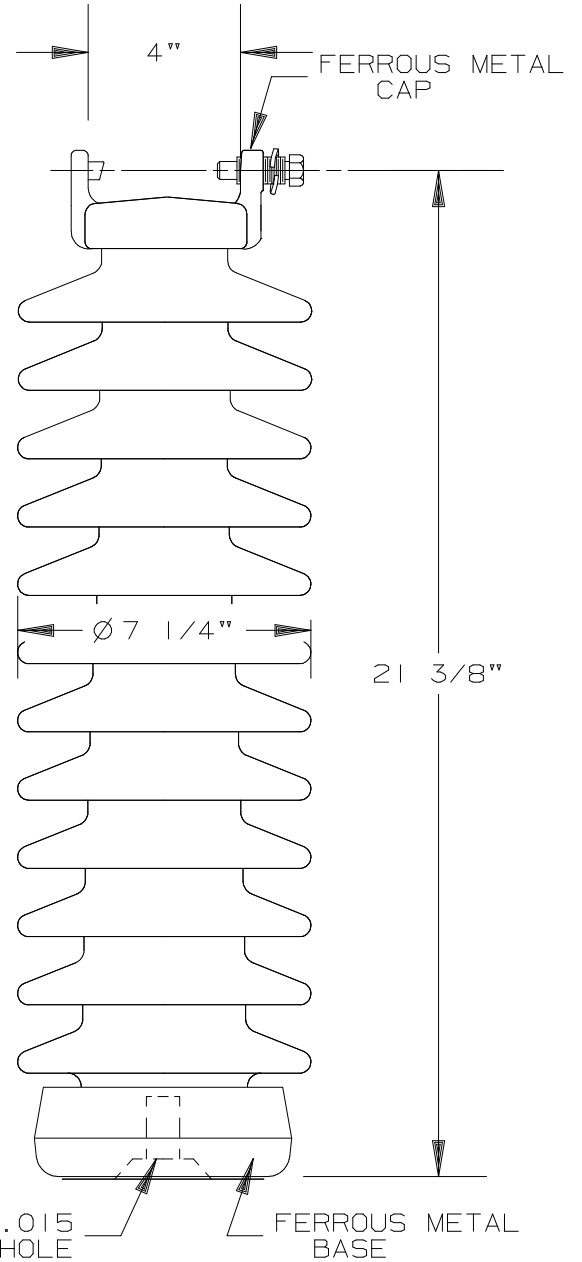

THIS DRAWING IS THE PROPERTY OF  
 VICTOR INSULATORS, INC. AND CONTAINS  
 PROPRIETARY AND CONFIDENTIAL INFORMATION  
 WHICH MUST NOT BE DUPLICATED, USED,  
 OR DISCLOSED OTHER THAN AS EXPRESSLY  
 AUTHORIZED BY VICTOR INSULATORS, INC.

	Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (716)924-2127	62158
---	---	-------