

30

CLAMP TOP LINE POST

HORIZONTAL MOUNTING

CAT. NO. 62250

15 kV

- 1 ENG. MGR.
- 2 ENG.
- PURCH.
- 1 MKTG.
- SUPT
- COST
- PROD.
- INSP.
- GLAZING
- BUSHING
- MAKING
- SHIP
- ASSEM.
- MACH.
- 45
- TOOLING
- CER. LAB.
- 1 EL. LAB.
- 1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE	IN	10
DRY ARCING DISTANCE	IN	5

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	2800
---------------------	----	------

ELECTRICAL VALUES

60 HERTZ FLASHOVER-DRY	kV	70
60 HERTZ FLASHOVER-WET	kV	60
IMPULSE FLASHOVER-POS.	kV	100
IMPULSE FLASHOVER-NEG.	kV	125


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	15
MAX. R.I.V. @ 1000 kHz	μV	50

PACKING INFORMATION

NET WEIGHT PER 100	LB	1275
GROSS WEIGHT PER 100	LB	1330
NUMBER IN STANDARD PACKAGE		3

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

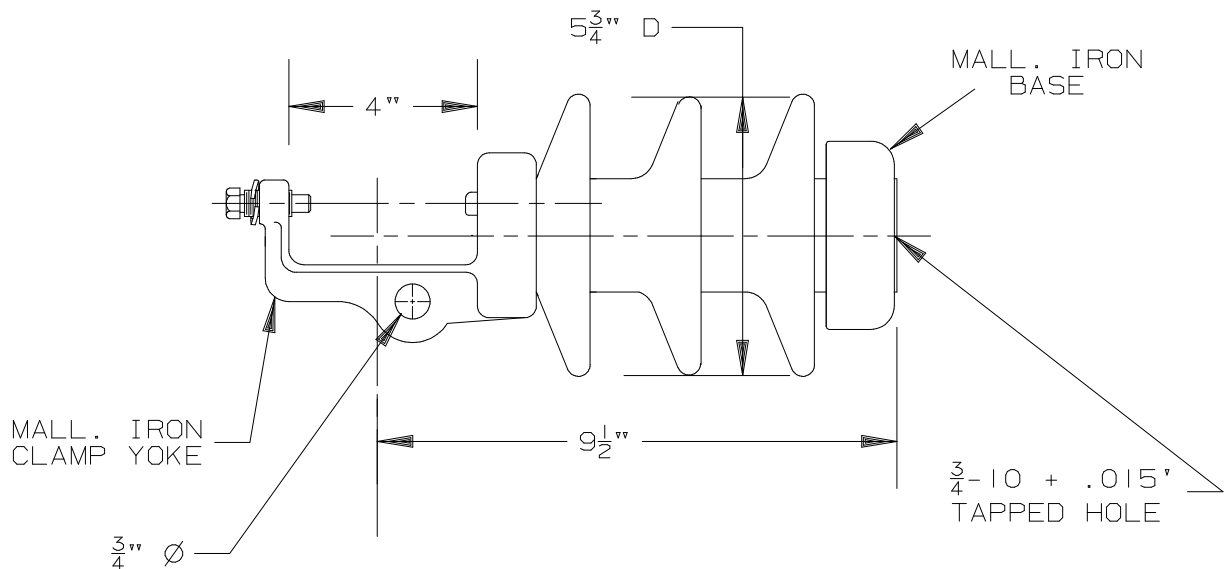

5-20-98

DF PP RG



Victor Insulators, Inc.
280 MAPLE AVENUE
VICTOR, NEW YORK 14564
TELEPHONE: (716)924-2127

62250