

30

CLAMP TOP LINE POST

HORIZONTAL MOUNTING

CAT. NO. 62253

ANSI CLASS 57-21

1 ENG. MGR.
 2 ENG.
 PURCH.
 1 MKTG.
 SUPT
 COST
 PROD.
 INSP.
 GLAZING
 BUSHING
 MAKING
 SHIP
 ASSEM.
 MACH.
 45
 TOOLING
 CER. LAB.
 EL. LAB. I
 Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 14
 DRY ARCING DISTANCE IN 6 1/2

MECHANICAL VALUES

CANTILEVER STRENGTH LB 2800

ELECTRICAL VALUES

60 Hz FLASHOVER-DRY kV 70
 60 Hz FLASHOVER-WET kV 50
 IMPULSE FLASHOVER-POS. kV 120


RADIO INFLUENCE VOLTAGE TEST

60 Hz TEST VOLTAGE RMS TO GRD. kV 15
 MAX. R.I.V. @ 1000 kHz μ V 100

PACKING INFORMATION

NET WEIGHT PER 100 LB 1500
 GROSS WEIGHT PER 100 LB 1560
 NUMBER IN STANDARD PACKAGE 3

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

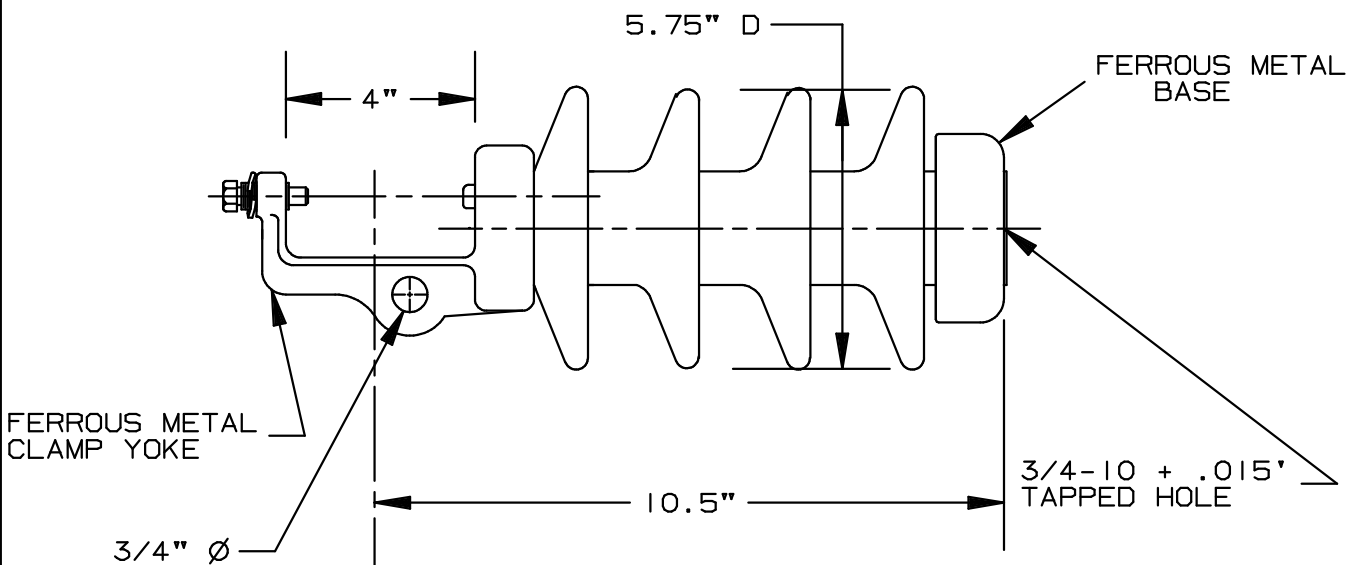

FILE: 62253



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

62253

7-19-96 MM PP AS

SUPERSEDES DWG. 62253 8-16-79