

30

CLAMP TOP LINE POST

HORIZONTAL MOUNTING

69kV CAT. NO. 62258

ANSI CLASS 57-25

- 1 ENG. MGR.
- 2 ENG.
- PURCH.
- 1 MKTG.
- COST
- PROD.
- INSP.
- GLAZE
- BUSHING
- MAKING
- SHIP.
- ASSEM.
- MODEL
- MACH.
- 45
- TOOLING
- CER. LAB.
- 1 EL. LAB.
- O. A.

DIMENSIONS

LEAKAGE DISTANCE IN 45
 DRY ARCING DISTANCE IN 17 1/4

MECHANICAL VALUES

CANTILEVER STRENGTH LB 2,800

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY kV 160
 60 HERTZ FLASHOVER-WET kV 130
 IMPULSE FLASHOVER -POS kV 265

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 44
 RMS TO GROUND μV 200
 MAXIMUM RIV @ 1000 kHz

PACKING INFORMATION

NET WEIGHT PER 100 LB 5200
 PACKED WEIGHT PER 100 LB 5500
 NO. IN STANDARD PACKAGE 1

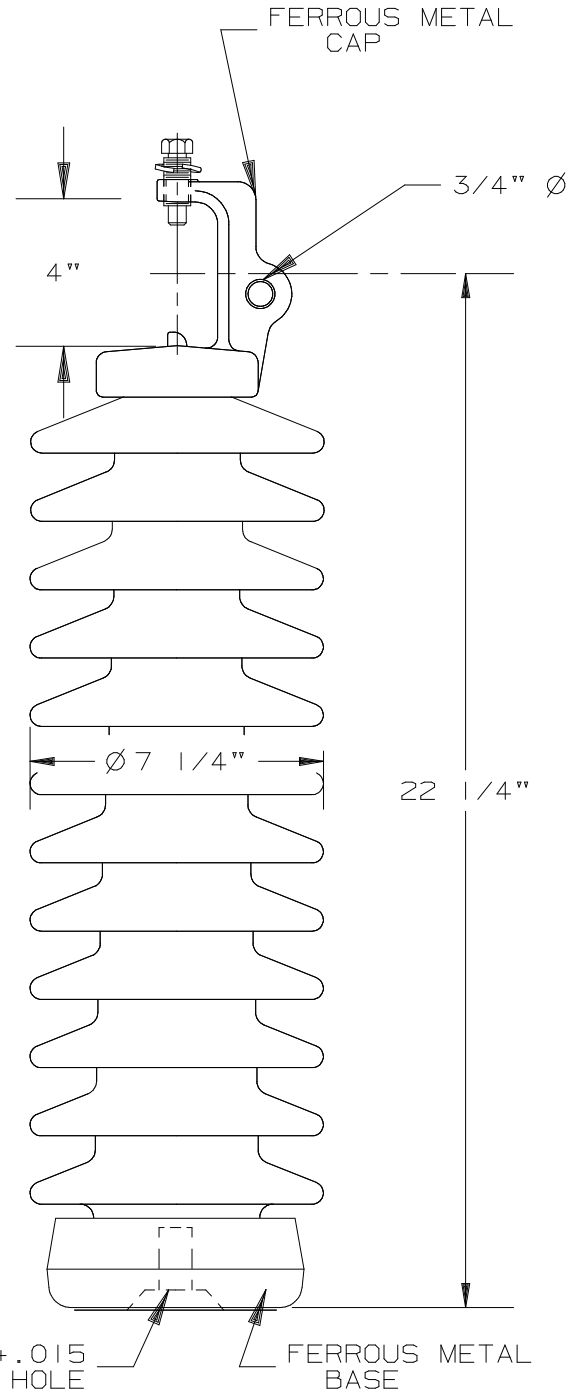

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND CONTAINS
 PROPRIETARY AND CONFIDENTIAL INFORMATION
 WHICH MUST NOT BE DUPLICATED, USED,
 OR DISCLOSED OTHER THAN AS EXPRESSLY
 AUTHORIZED BY VICTOR INSULATORS, INC.

7-18-96

MM PP AS



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

62258