

30

CLAMP TOP LINE POST

HORIZONTAL MOUNTING

88 Kv CAT. NO. 62259

ANSI CLASS 57-26

DIMENSIONS

LEAKAGE DISTANCE IN 53  
 DRY ARCING DISTANCE IN 19 1/4

MECHANICAL VALUES

CANTILEVER STRENGTH LB 2,800

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY kV 180  
 60 HERTZ FLASHOVER-WET kV 150  
 IMPULSE FLASHOVER-POS. kV 300

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 44  
 RMS TO GROUND  $\mu$ V 200  
 MAXIMUM RIV @ 1000 kHz

PACKING INFORMATION

NET WEIGHT PER 100 LB 6850  
 PACKED WEIGHT PER 100 LB 7250  
 NO. IN STANDARD PACKAGE 1

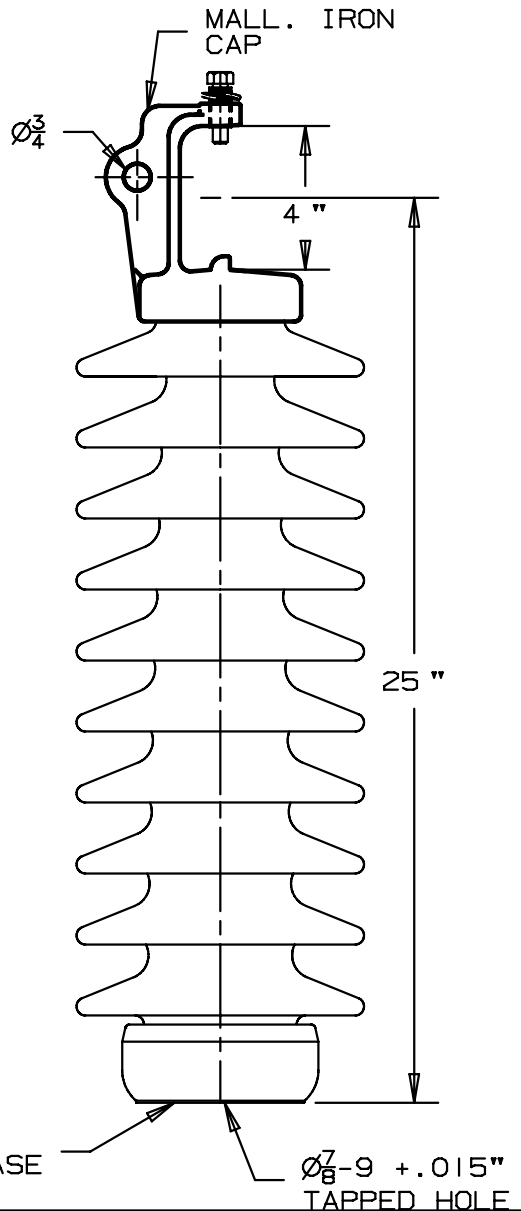

APPROVED  
 By A. E. Schwalm at 6:59 am, May 17, 2008

05-16-08	REV'D PORC		TM	
5-22-98		TM	PP	RG



Victor Insulators, Inc.  
 280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (585)924-2127

62259

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.