

30

POLE GAIN LINE POST

HORIZONTAL MOUNTING

88 Kv CAT. NO. 62359

ANSI CLASS 57-36

ENG. MGR.  
 2 ENG.  
 PURCH.  
 MKTG.  
 COST  
 PROD.  
 INSP.  
 GLAZE  
 BUSHING  
 MAKING  
 SHIP.  
 ASSEM.  
 MODEL  
 MACH.  
 45  
 TOOLING  
 CER. LAB.  
 EL. LAB.  
 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE	IN	53
DRY ARCING DISTANCE	IN	19 $\frac{1}{4}$

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	2,800
TENSILE STRENGTH	LB	5,000

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY	kV	180
60 HERTZ FLASHOVER-WET	kV	150
IMPULSE FLASHOVER-POS.	kV	300
IMPULSE FLASHOVER-NEG.	kV	425

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	44
RMS TO GROUND	$\mu$ V	200
MAXIMUM RIV @ 1000 kHz		

PACKING INFORMATION

NET WEIGHT PER 100	LB	8000
PACKED WEIGHT PER 100	LB	8150
NO. IN STANDARD PACKAGE		1

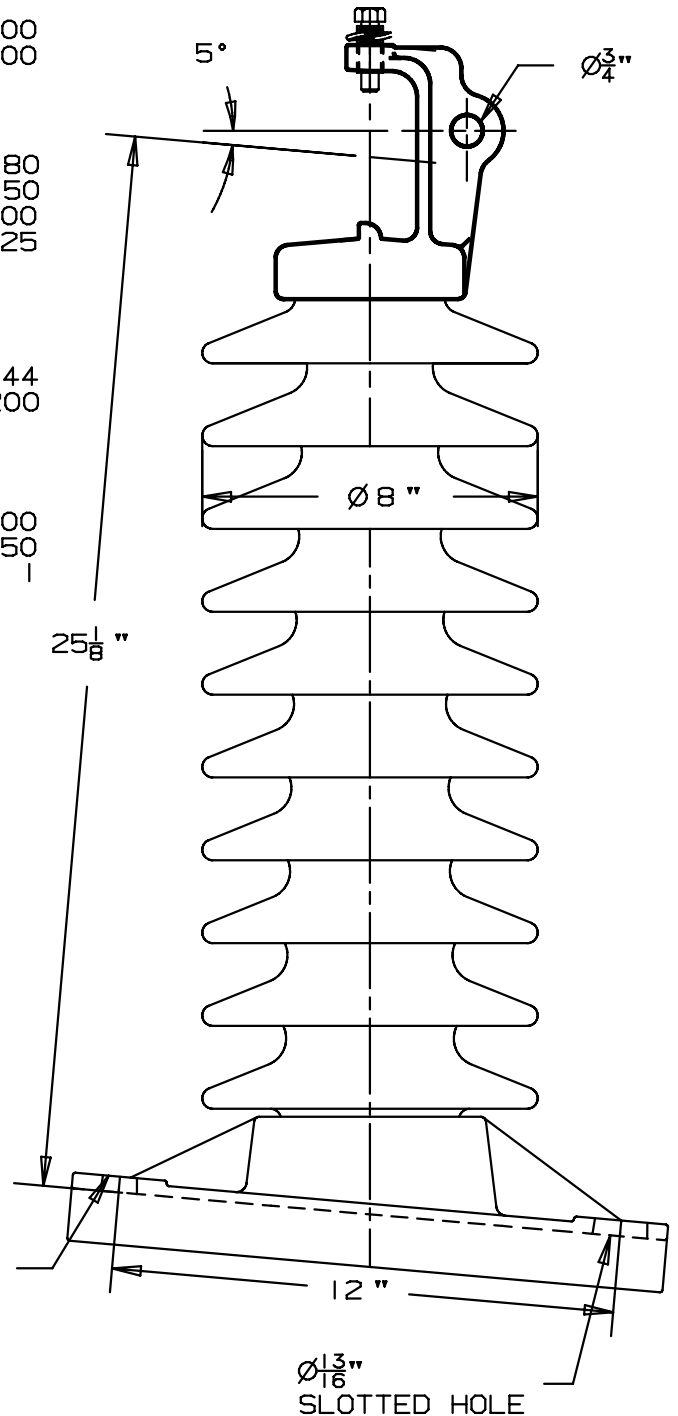

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 62359

**APPROVED**  
 By A. E. Schwalm at 7:35 am, Jun 25, 2008

06-24-08	ADDED VALUES	TM		
05-16-08	REV'D PORC	TM		RG
5-22-98		TM	PAP	RG

	Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (585)924-2127
	62359