19

LOW VOLTAGE PIN TYPE
CAT. NO. 6R
F-NECK 1" PINHOLE
ANSI CLASS 55-4

1 ENG. MGR.
2 ENG.
PURCH.
1 MKTG.
PLT. MGR.
COST
PROD.
INSP.
GLAZE
BUSHING
MAKING
SHIP.
ASSEM.
MODEL
MACH.
45
TOOLING
CER. LAB.
1 EL. LAB.
1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE	IN	9
DRY ARCING DISTANCE	IN	5
MINIMUM PIN HEIGHT	IN	5

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS.	kV	105
IMPULSE FLASHOVER-NEG.	kV	130
60 HERTZ FLASHOVER-WET	kV	35
60 HERTZ FLASHOVER-DRY	kV	65
60 HERTZ PUNCTURE VOLTAGE	kV	95

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	10
MAXIMUM RIV @ 1000 kHz	µV	50

PACKING INFORMATION

NET WEIGHT PER 100	LB	361
PACKED WEIGHT PER 100	LB	383
NO. IN STANDARD PACKAGE		12

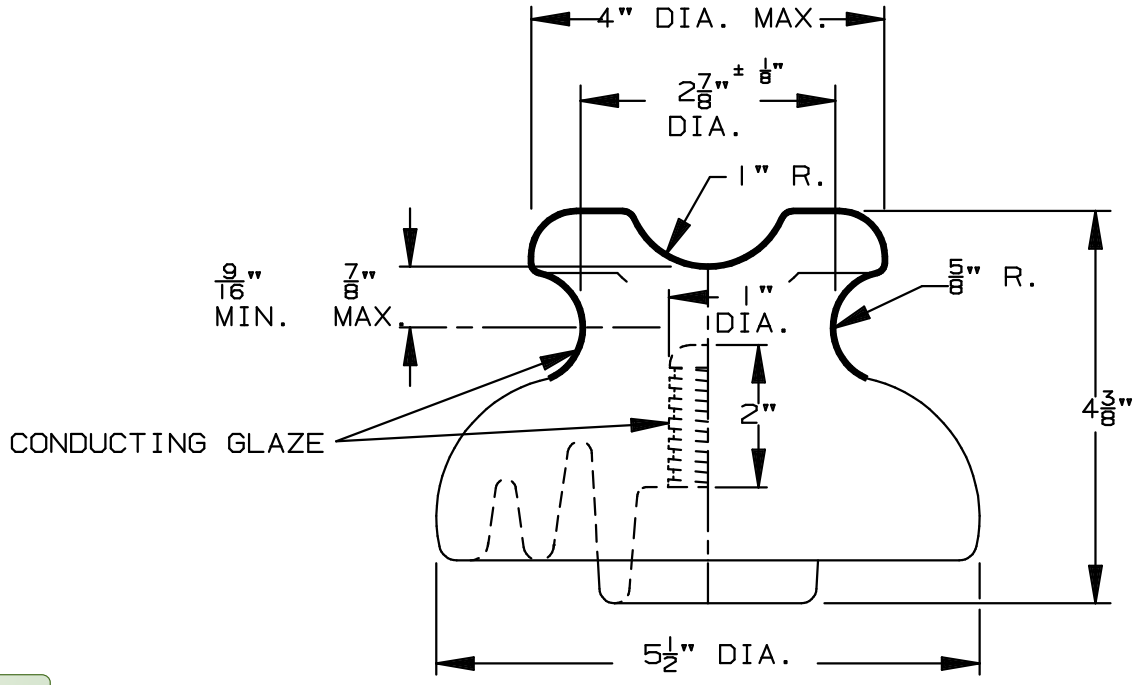

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By Andrew E. Schwalm at 1:02 pm, Jul 27, 2012

07-26-12	TM			C
10-23-01	TM	PP	AS	B
4-9-92	BA	PP		A

Victor Insulators, Inc.
280 MAPLE AVENUE
VICTOR, NEW YORK 14564
TELEPHONE: (585)924-2127

6R

SUPERSEDES DWG. 6R DATED 7-31-85

FILE: 6R