

19

LOW VOLTAGE PIN TYPE
CAT. NOS. 8 & 8R
C-NECK 1" PINHOLE
ANSI CLASS 55-2

1 ENG. MGR
 2 ENG
 PURCH.
 1 MKTG.
 PLT. MGR.
 COST
 PROD.
 INSP
 GLAZE
 BUSHING
 MAKING
 SHIP
 ASSEM
 MODEL
 MACH.
 45
 TOOLING
 CER LAB
 EL LAB
 E.MEDIA

DIMENSIONS

LEAKAGE DISTANCE IN 5

MECHANICAL VALUES

CANTILEVER STRENGTH LB 2,500

ELECTRICAL VALUES


60 HERTZ FLASHOVER - DRY	kV	45
60 HERTZ FLASHOVER - WET	kV	25
IMPULSE FLASHOVER - POS.	kV	70
IMPULSE FLASHOVER - NEG.	kV	85
60 HERTZ PUNCTURE VOLTAGE	kV	70

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE RMS TO GRD.	kV	5
MAXIMUM RIV @ 1000 kHz		
FOR CAT. NO. 8	μV	2,500
FOR CAT. NO. 8R	μV	50

PACKING INFORMATION

NET WEIGHT , PER 100	LB	134
PACKED WEIGHT , PER 100	LB	142
NO. IN STANDARD PACKAGE		24

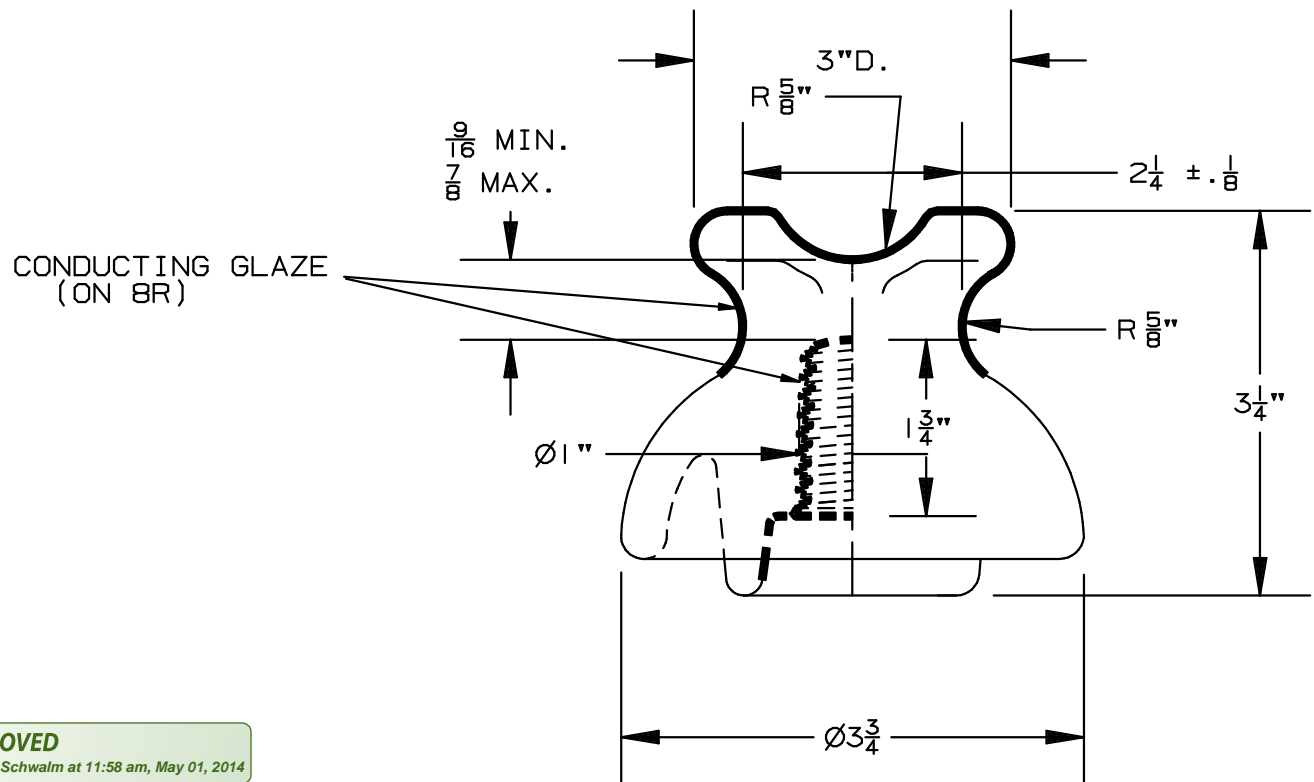

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
 By A. E. Schwalm at 11:58 am, May 01, 2014

FILE: 8 & 8R

05-01-14	TM		B	 Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (585)924-2127	8 & 8R
11-17-09	TM	A			
04-07-95	RR				