

COMPOSITE TIE TOP LINE POST

CAT. NO. VI 51-2F

ANSI CLASS 51-2F

F NECK

DIMENSIONS:

LEAKAGE DISTANCE mm 530

MECHANICAL VALUES:

SPECIFIED CANTILEVER LOAD(SCL) kN 8
 SPECIFIED TENSILE LOAD(STL) kN 8.9

ELECTRICAL VALUES:


60 HERTZ FLASHOVER-DRY kV 90
 60 HERTZ FLASHOVER-WET kV 50
 IMPULSE FLASHOVER-POS kV 165

RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND kV 15
 MAXIMUM R.I.V. @ 1000 kHz μV 100

PACKAGING INFORMATION:

NET WEIGHT, EACH kg 4.3

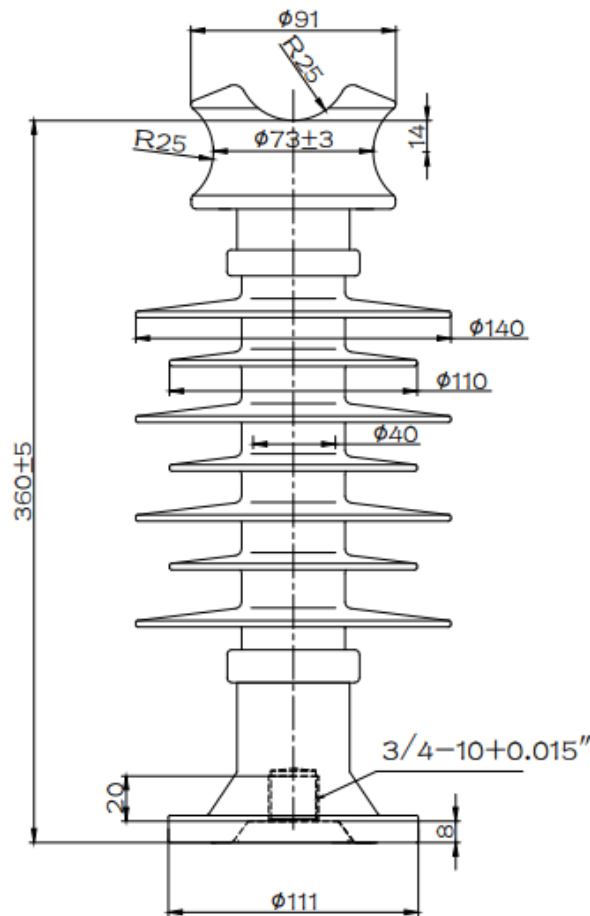

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
 By A. E. Schwalm at 11:08 am, Feb 02, 2023

01-24-22

TM

03-09-21

TM



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

VI 51-2F

VI 51-2F

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA